

**Part No.** 109325200

**Series** Multi-X Quattro 12.5/19

[PDF](#)

[Inquiry List](#)

---

**Category**

GII - Quattro 12.5/19 (201909-)

---

**Description Class**

FEMALE PLATE

---

**Body Size Inch**

1/2"+3/4"

---

**Body Size Dash**

-08+-12

---

**Number of connections**

4

---

**Connection**

G 1/2"+G 3/4" (BSP)

---

**L**

120 mm

---

**W**

214 mm

---

**H1**

107 mm

---

**H2**

170 mm

---

**H3**

5 mm

---

## Multi-X Quattro 12.5/19

Multi-connection plate with 4 ports, size DN12.5/19. Integrated pressure eliminators. Working pressure of up to 350 bar.



---

**Max. working pressure**

350 bar (5076 PSI)

---

**Min. burst pressure**

1200 bar (17404 PSI)

---

**Temperature range**

-30°C — +100°C (-22°F — +212°F)

---

**Material female plate**

Zinc plated steel, anodized aluminum, brass

---

**Material male plate**

Zinc plated steel, anodized aluminum, brass

---

**Material seal**

NBR/PUR

---

**Connectability**

1: Up to 350 bar residual pressure on the male side and free to drain on the female side. 2: Up to 60 bar residual pressure on the female side and free to drain on the male side. 3: Up to 220 bar residual pressure on the male side and 10 bar return pressure on the female side.

---

**Disconnection under pressure**


To be avoided. Residual pressure can result in recoil effect during disconnection. Always grip the lever firmly.

---

**Comment**

Contact CEJN technical support for recommendations for high impulse applications.

Check with an authorized CEJN distributor for availability and prices. Other connections and sealing material on request. Some part numbers may be subject to minimum order quantities. CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO Standards. All measurements are in mm.

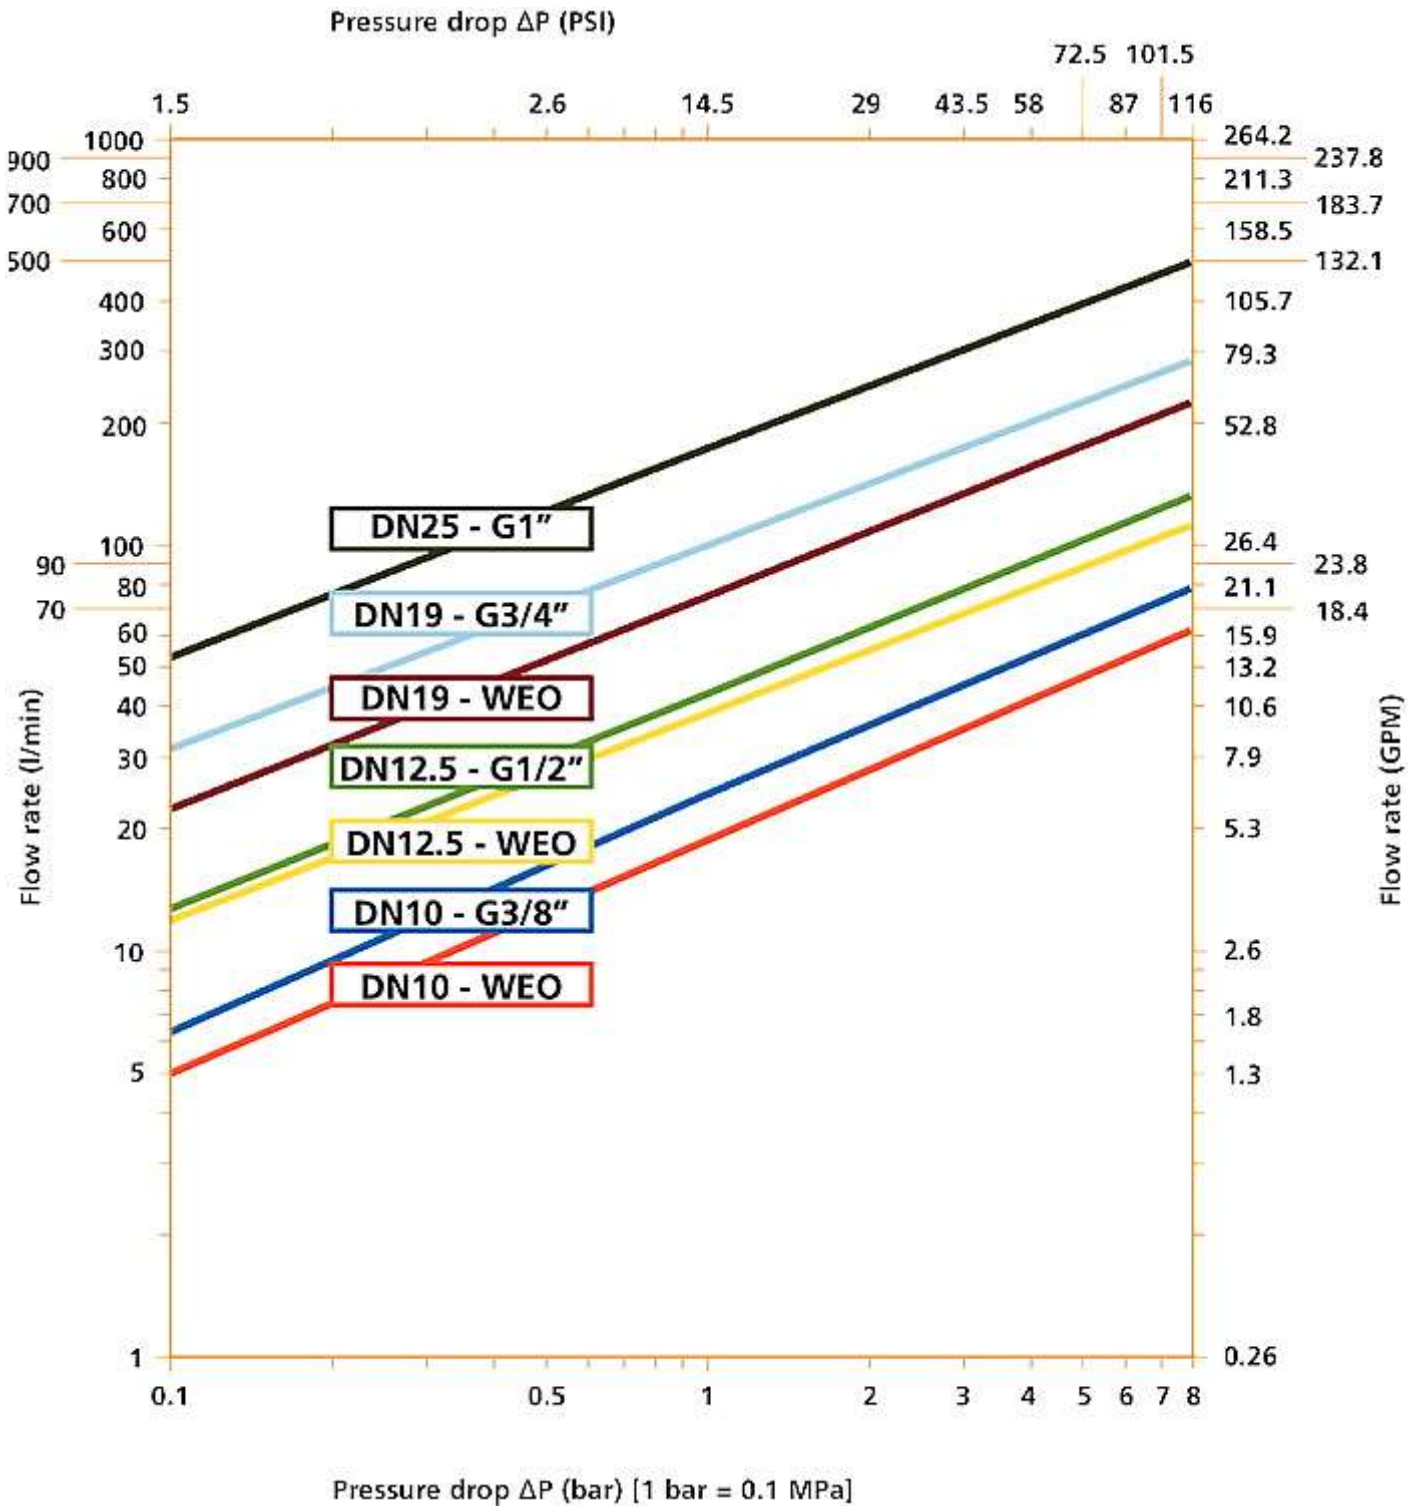

**Oil Flow**

x: Chart flow l/min (GPM UK)

y: Chart pressure drop MPa