



SVH 062, 092, 112, 130



The Sunfab variable displacement pump with its rugged construction is designed for direct mounting at the auxiliary drive (P.T.O.) of commercial vehicles.

With a max. displacement of 7.93 cu in/rev. and a peak pressure of 6527 psi it is suited for many applications. This is complemented by the high self priming rate and the low noise level. The pump delivery flow is dependent on the present drive speed and geometric displacement. The flow is adjustable in a range between 0 and Q_{max} .

Long service life is ensured due to the pressurized lubrication of the swash plate bearing shell.


Sunfab SVH is rotation-direction dependent and should be ordered in either right-hand or left-hand designs.

Other advantages of Sunfab SVH:

- Short reaction time when resetting the flow
- Compact installation dimensions
- High working pressure level allowed
- Externally drained for best cooling
- Rugged construction and long service life
- Low noise emission
- High power-to-weight-ratio



Versions, main data

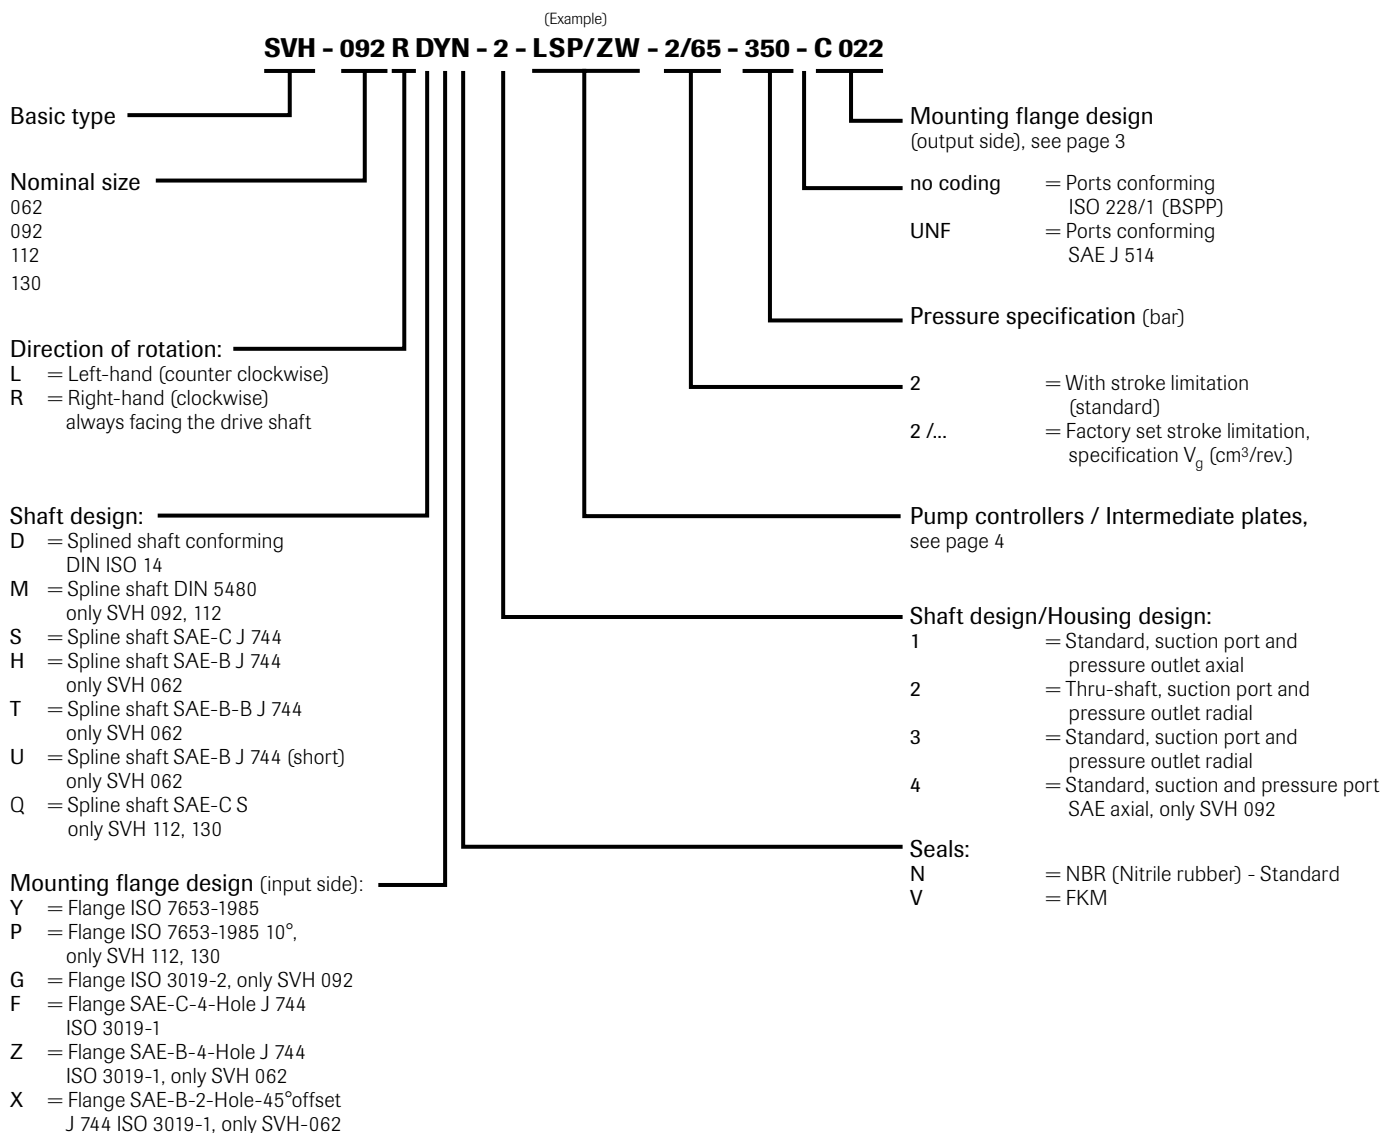

Type		SVH 062	SVH 092	SVH 112	SVH 130
Geometric displacement V_g	cu in/rev.	3.81	5.32	6.74	7.93
Nom. pressure p_{nom}	psi	5076	5076	5076	5800
Pressure p_{max}	psi	5800	5800	5800	6527
Angle of the swash plate		21.5°	21.5°	21.5°	21.5°
Required inlet pressure (absolute) for open circuit	psi	12.3	12.3	12.3	12.3
Max. permissible inlet pressure, absolute	psi	29.0	29.0	29.0	29.0
Max. permissible housing pressure, absolute	psi	43.5	43.5	43.5	43.5
Max. permissible drive torque (flange/shaft)	lb-ft	317	391	664	664
Max. torque for the pump (with power controller)	lb-ft	317	391	443	516
Max. permissible torque for the thru-shaft, dep. on flange	lb-ft	73.8	391	443	516
Max. rev. rating when self priming and max. angle of the swash plate at 1 bar absolute inlet pressure	rpm	2500	2300	2200	2100
Min. rev. rating for permanent running	rpm	500	500	500	500
Required torque at 1450 psi	lb-ft	73.8	111	136	170
Drive power for 3626 psi and 2000 rpm	hp	71.1	107	130	161
Mass (weight) complete with controller	lb	52.9	59.5	66.1	67.9
Tare weight torque	lb-ft	22.1	26.0	29.5	29.5
Inertia moment	lb in ²	17.1	27.3	34.2	37.6
Sound level at 3626 psi, 1500 rpm and max. swash plate angle (Measured in a sound measuring room DIN ISO 4412, distance 39,4 in)	dB(A)	75	75	75	75



Flange versions (output side)

Coding, SVH			Flange	Shaft
062	092, 112	130		
C 001	C 002	C 003	Prepared for thru-shaft (cover)	
C 010	--	C 030	ISO 7653-1985	DIN ISO 14
C 011	C 021	C 031	SAE-A 2-hole J 744 82-2 ISO 3019-1	SAE-A J 744 (16-4 ISO 3019-1) 9T 16/32 DP
C 012	C 022	C 032	SAE-A 2-hole J 744 82-2 ISO 3019-1	SAE-A J 744 (16-4 ISO 3019-1) 1) 9T 16/32 DP
C 013	--	--	SAE-A 2-hole J 744 82-2 ISO 3019-1	19-4 ISO 3019-1 11T 16/32 DP
C 014	C 024	C 034	SAE-B 2-hole J 744 101-2 ISO 3019-1	SAE-B J 744 (22-4 ISO 3019-1) 13T 16/32 DP
--	C 026	C 036	SAE-B 2-hole J 744 101-2 ISO 3019-1	SAE-BB J 744 (25-4 ISO 3019-1) 15T 16/32 DP
C 015	C 025	C 035	SAE-B 4-hole J 744 101-4 ISO 3019-1	SAE-B J 744 (22-4 ISO 3019-1) 13T 16/32 DP
--	C 027	C 037	SAE-C 2-hole J 744 127-2 ISO 3019-1	SAE-C J 744 (32-4 ISO 3019-1) 14T 12/24 DP
--	C 028	C 038	SAE-C 4-hole J 744 127-4 ISO 3019-1	SAE-C J 744 (32-4 ISO 3019-1) 14T 12/24 DP

¹⁾ ANSI B 92.1, FLAT ROOT SIDE FIT, spline width deviating from the standard, $s = 2.357-0.03$

Attention: Observe the max. drive torque rating!

Note: An additional support has to be provided in case of pump combinations. Additional versions on request!

Max. permissible drive/output torque


Description		Nominal size			
		062	092	112	130
Splined shaft D	Drive/output	530 Nm/100 Nm	800 Nm/600 Nm	800 Nm/600 Nm	800 Nm/700 Nm
Spline shaft M	Drive/output	--	530 Nm/530 Nm	530 Nm/530 Nm	--
Spline shaft H	Drive/output	210 Nm/100 Nm	--	--	--
Spline shaft U	Drive/output	210 Nm/100 Nm	--	--	--
Spline shaft T	Drive/output	340 Nm/100 Nm	--	--	--
Spline shaft S	Drive/output	530 Nm/100 Nm	640 Nm/600 Nm	640 Nm/600 Nm	640 Nm/640 Nm
Spline shaft Q	Drive/output	--	900 Nm/600 Nm	900 Nm/600 Nm	900 Nm/700 Nm




Description of the controllers

LSP	Load-Sensing controller with integrated pressure limitation
P	Pressure controller, adjustable directly at the pump. The Pressure controller automatically maintains a constant system pressure independent of the required flow. Therefore it is suited for constant pressure systems, where differing flow is required or as efficient pressure limitation of the hydraulic system
Intermediate plates	Intermediate plate only in combination with controllers LSP or P
/ZL	SVH 062, 092, 112: Intermediate plate with power controller (torque limitation) Product "Pressure x Displacement" = constant Adjustment range: 25...100% of max. drive torque Factory setting: 147 lb-ft
/ZW	Angled intermediate plate (45°) mandatory for mounting controllers at SVH 062-112 pumps with housing design -2, -3
/L	SVH 130: Power controller (torque limitation), default option Adjustment range: 147-516 lb-ft Factory setting: 516 lb-ft


Controller Coding /LSP, P

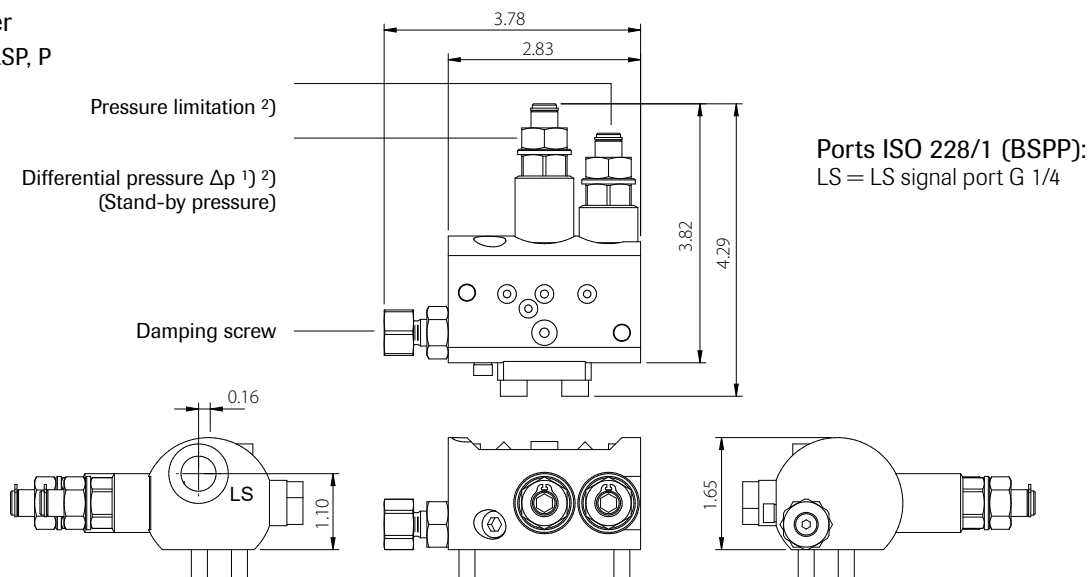


Intermediate plate Coding /ZW version with thru-shaft



Controller Coding /ZL intermediate plate version

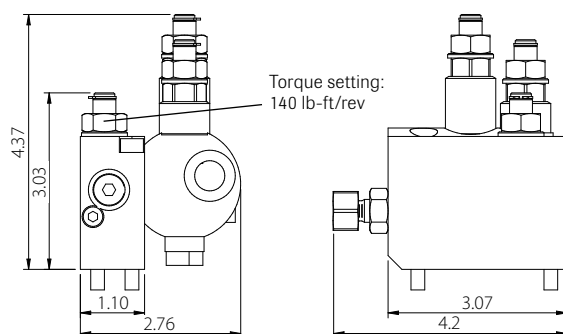

Controller Coding /L




Pressure adjustment	Pressure range (psi)	Δp (psi)/rev.	Pressure setting, factory set (psi)
Pressure limitation	290 ... 5800	725	5076
Differential pressure Δp	290 ... 798	145	392

¹⁾ Applies only coding LSP. ²⁾ The adjustment range is limited by a mechanical stop. Attention: Always use a pressure gauge when changing the pressure setting!




Controller symbols


Coding **LSP**

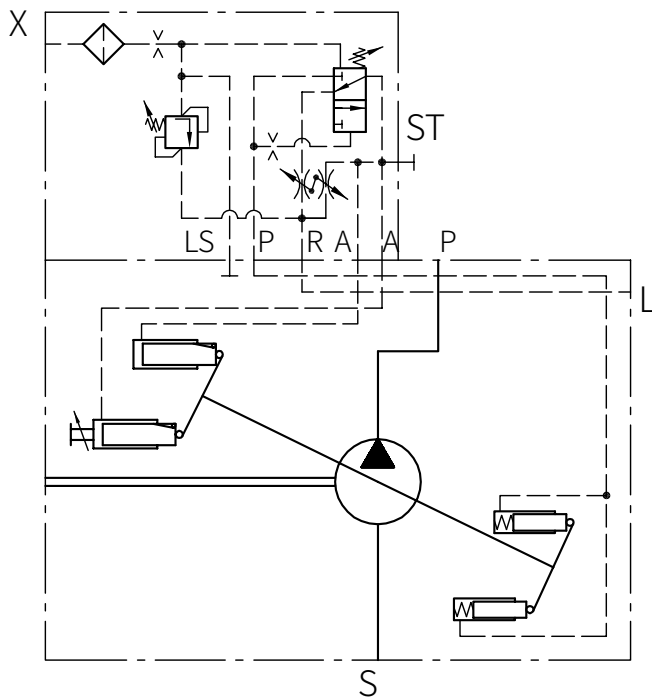


Coding **P**

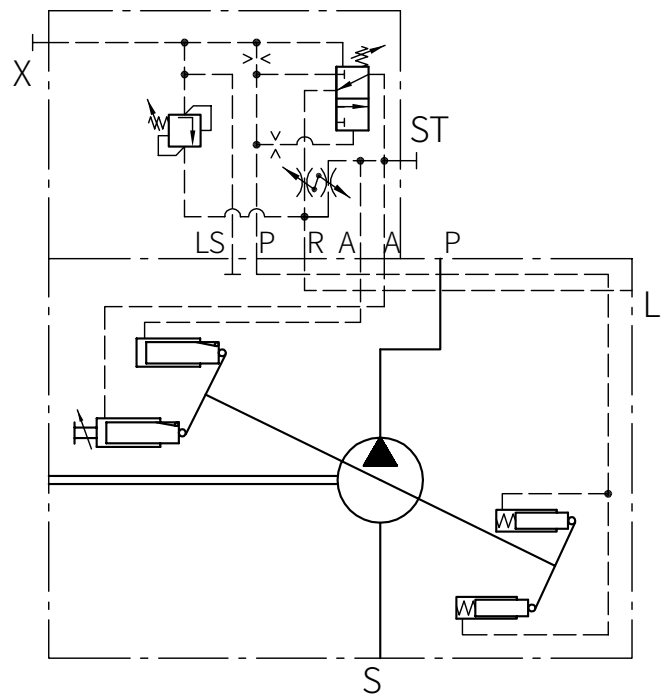

Coding **.../ZL**

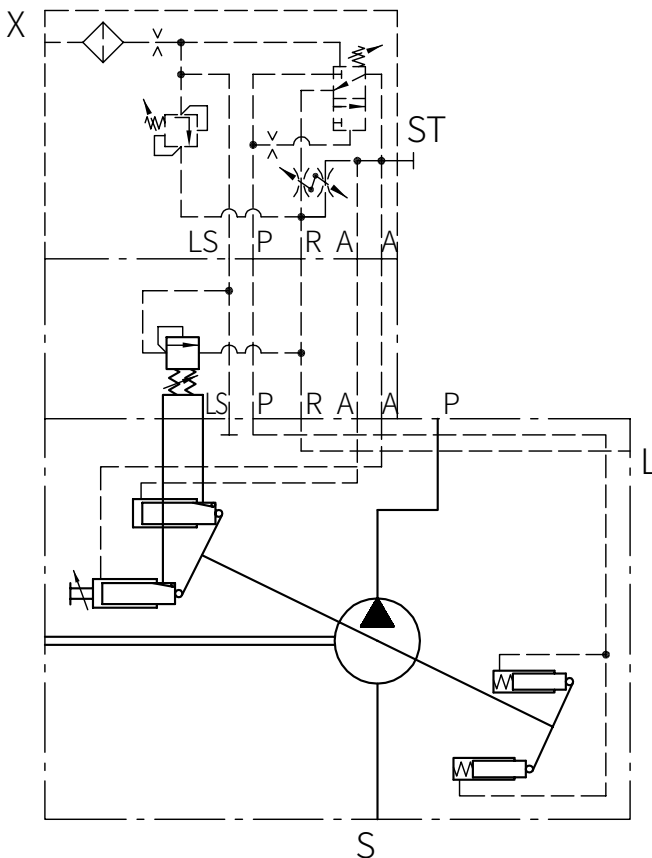

Coding **.../L**
for SVH 130

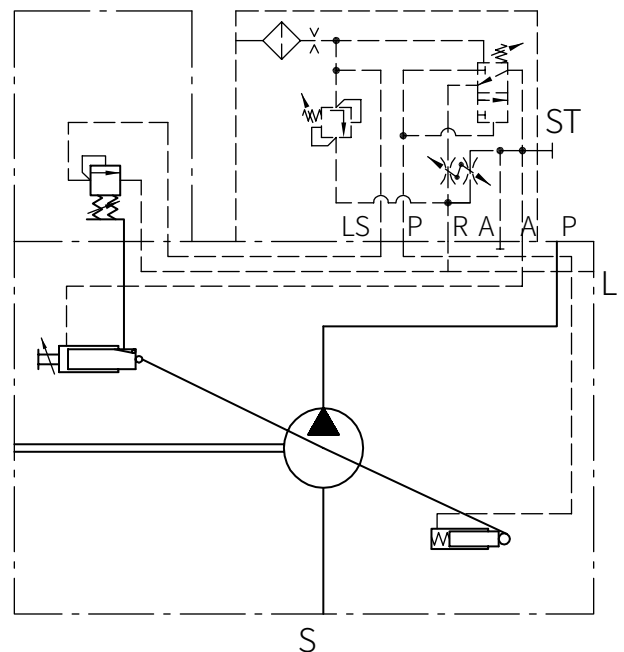



Additional parameter, general

Calculation of the nom. sizes:

Flow rate

$$Q = \frac{V_g \times n \times \eta_v}{1000} \quad (\text{lpm})$$

Torque

$$M = \frac{1,59 \times V_g \times \Delta p}{100 \times \eta_{mh}} \quad (\text{Nm})$$

Power

$$P = \frac{2\pi \times M \times n}{60000} = \frac{M \times n}{9549} = \frac{Q \times \Delta p}{600 \times \eta_t}$$

V_g Displacement (cm³/rev.)

η_v = Volumetric efficiency

Δp Differential pressure (bar)

η_{mh} = Mechanical-hydraulic efficiency

n Speed (rpm)

η_t = Total efficiency ($\eta_t = \eta_v \times \eta_{mh}$)

Nomenclature

Axial piston pump according to the swash plate principle

Mounting

At the auxiliary drive of commercial vehicles
(flange ISO 7653-1985 for trucks) or flange assembly
(flange ISO 3019-2 or SAE/ISO 3019-1)

Surface

Painted, RAL 7043 (Traffic grey)

Direction of rotation

Right or left

Changing the rotation direction

Contact Sunfab

Installed position

Any (observe the installation instructions)

Hydraulic fluid

Hydraulic oil acc. to DIN 51524 part 1 to 3; ISO VG 10 to 68 acc. to DIN 51519
Viscosity range: min. approx. 10; max. approx. 1000 cSt
Optimal operation range: approx. 20...50 cSt. Also suitable are biologically degradable pressure fluids type HEES (synth. Ester) at operation temperatures up to approx. 158 F.

Temperature

Ambient: approx. -40...+140 F

Fluid: -13...+176 F, pay attention to the viscosity range!

Start temperature down to -40 F is allowable (Pay attention to the viscosity range during start!), as long as the operation temperature during subsequent running is at least 68 F higher.

Filtration



Should conform to ISO standard 4406 code 21/18/15 ...19/17/13



Curves

Flow and Power


Charts show flow/pressure (without controller). Power at max. setting angle and power at min. setting angle and 1500 rpm

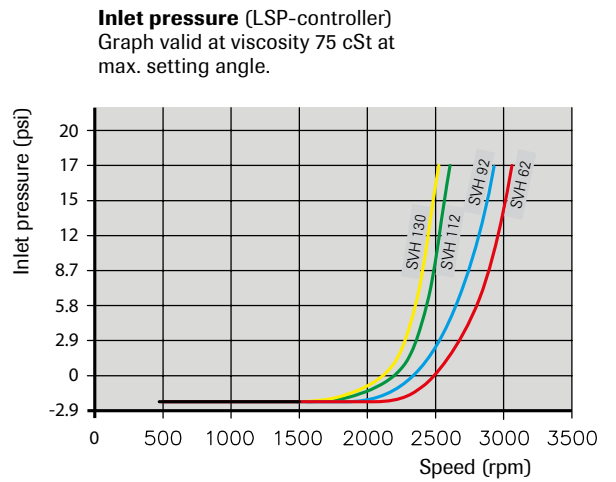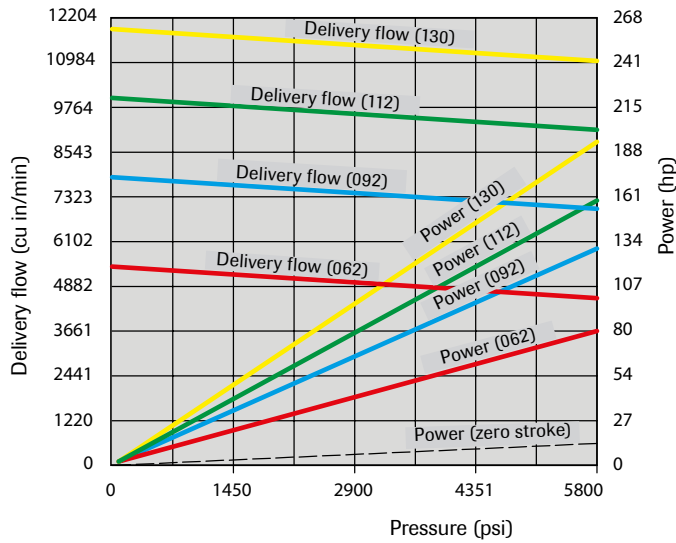


Controller curve

Coding **L**


Pressure / Delivery flow

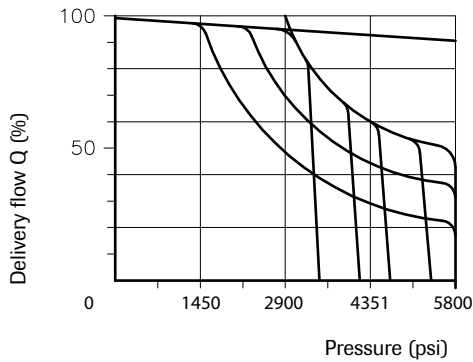



Response time T_1 (LSP-controller)

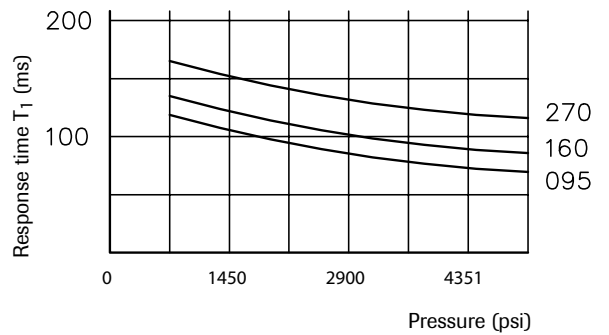

Coding **LSP**

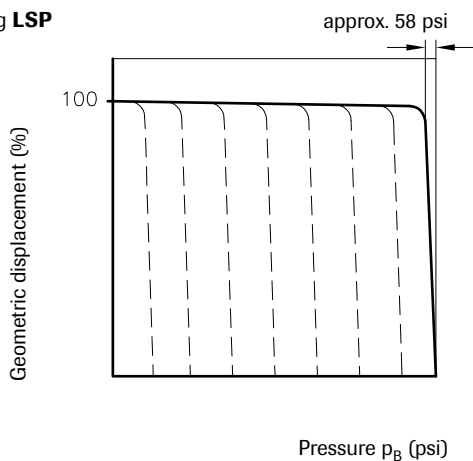

Response time T_2 (LSP-controller)




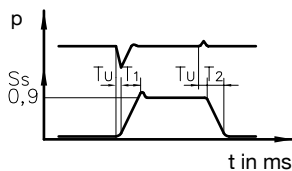
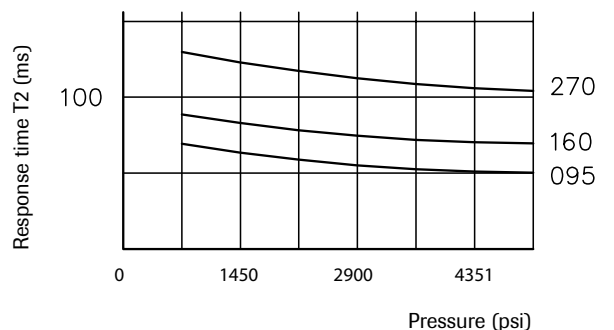


- S_s = Regulating distance actuator
- T_u = Delay < 3 ms
- T_1 = Response time min to max
- T_2 = Response time max to min
- p = Pressure

LS-line min. length 59 in, min. internal diameter 0.47 in



Basic pumps: SVH 062

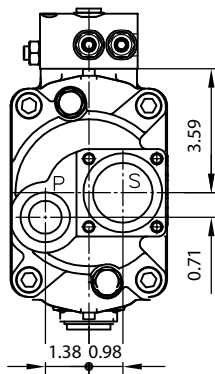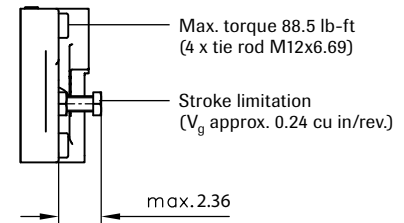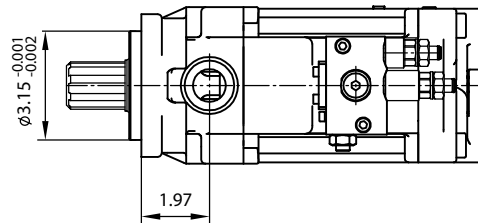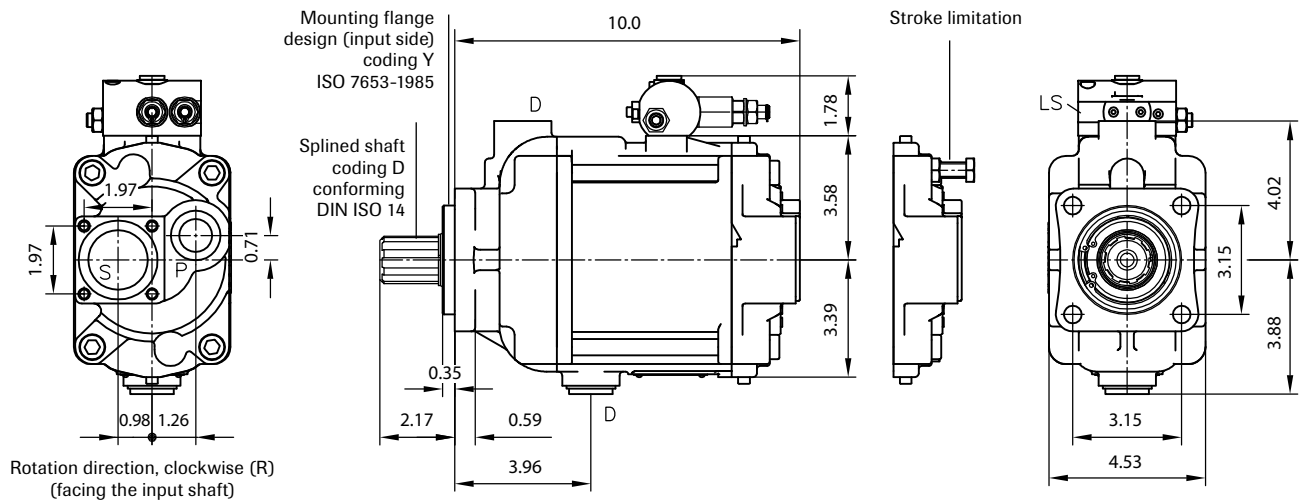

Rotation direction, counter clockwise (L) (facing the input shaft)

Coding UNF ports conforming SAE J 514:

P = 1 1/16-12 UN-2B

S = Flange, suction port

D = 1 1/16-12 UN-2B


LS = G 1/4 (ISO 228/1 (BSPP)) with adaptor for 7/16-20 (SAE-4)

Ports (ISO 228/1 (BSPP)):


P = Pressure outlet G 3/4

S = Flange, suction port


D = Case drain G 3/4

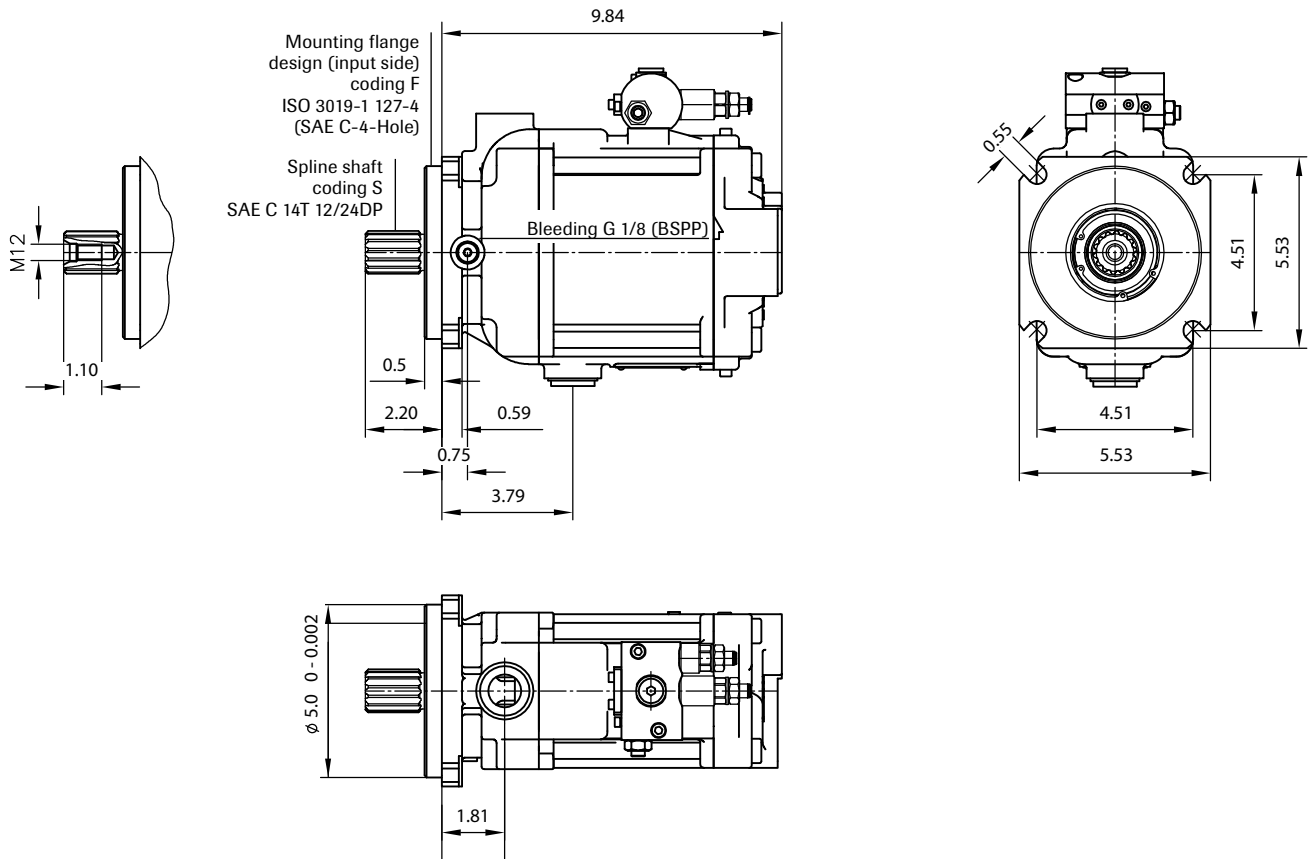

Additional input shaft designs

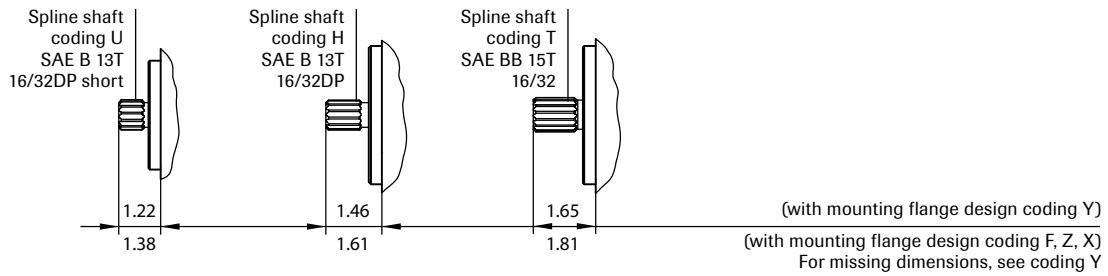


Additional mounting flange design




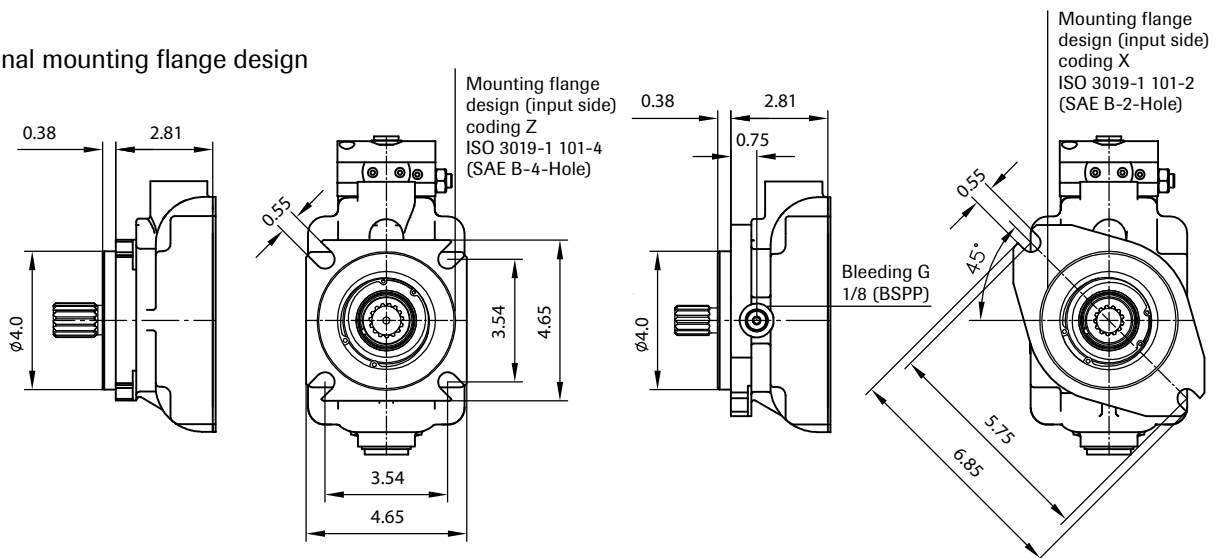






SVH 062 with thru-shaft

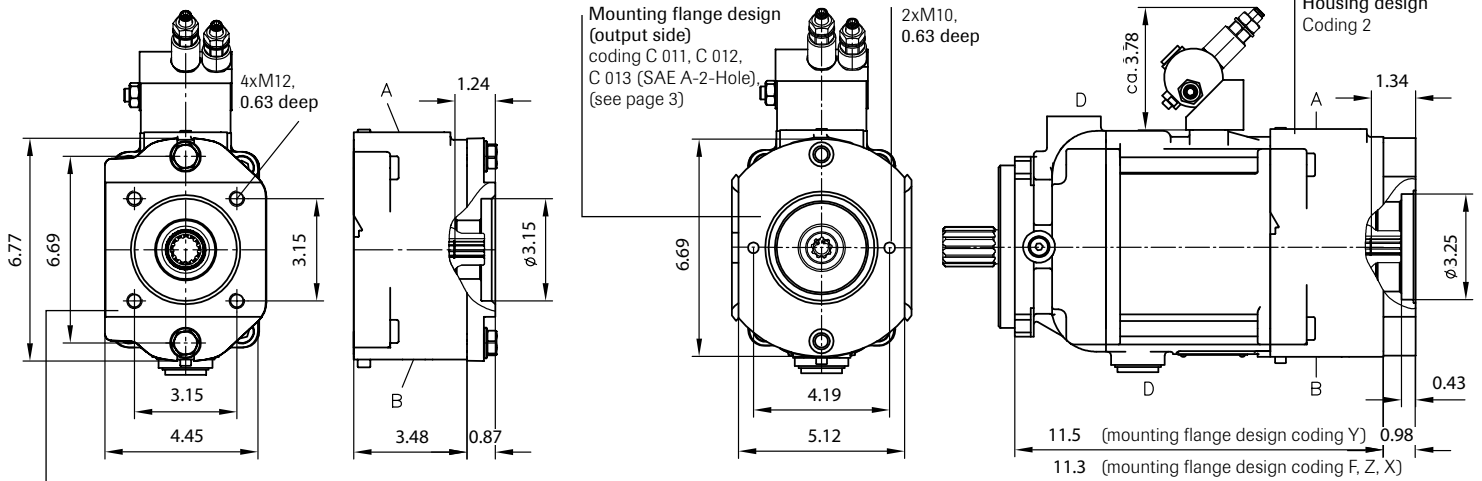

Mounting flange design (output side) coding C 010 (DIN ISO 7653) (see page 3)

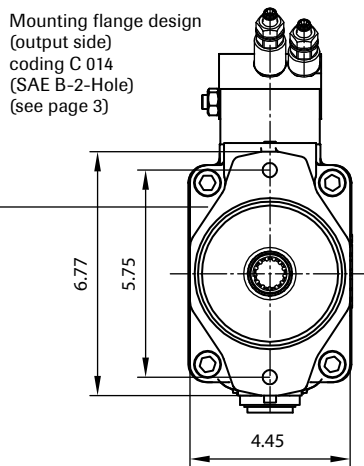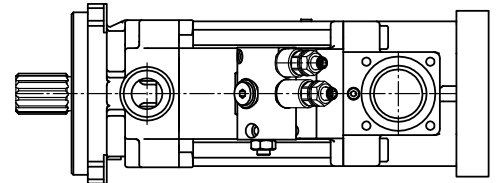

Mounting flange design (output side) coding C 014 (SAE B-2-Hole) (see page 3)

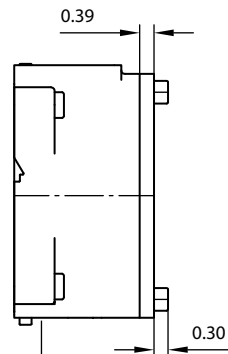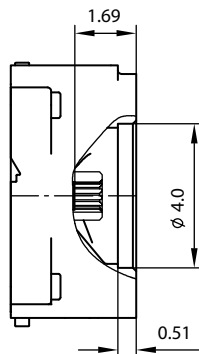


- Right hand
- A Suction port
- B Pressure outlet



- Left hand
- A Pressure outlet
- B Suction port

For port sizes, see page 8

Housing design Coding 3

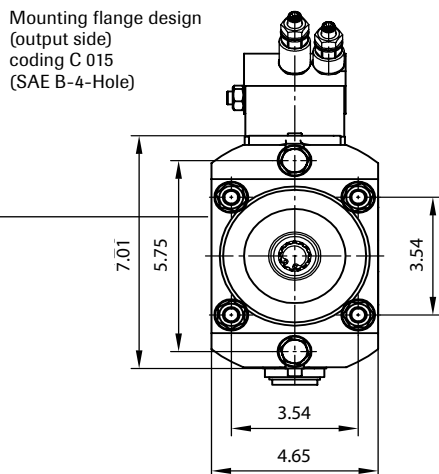

Mounting flange design (output side) coding C 015 (SAE B-4-Hole)





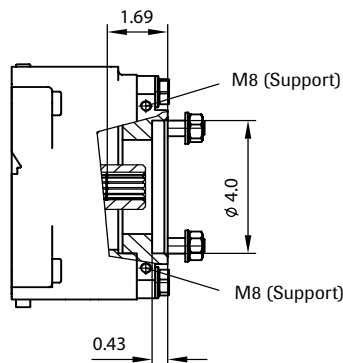


For missing dimensions, see coding Y

For available mounting flange designs (output side) and coupling sleeves, see page 3



SVH 092

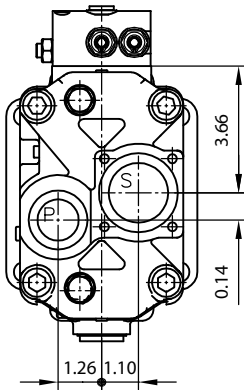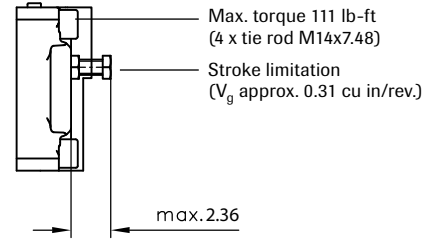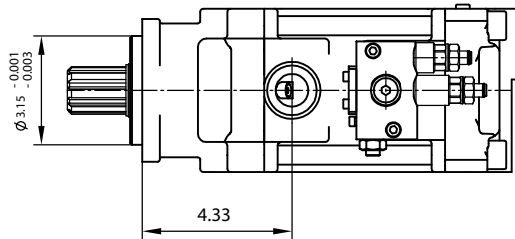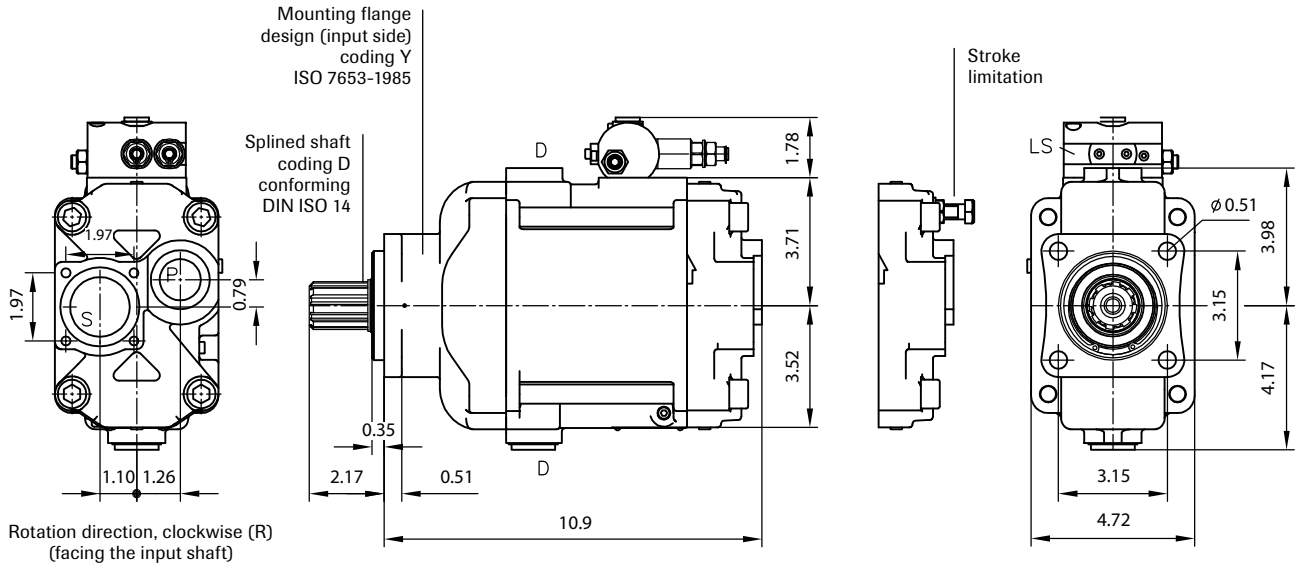

Coding UNF ports conforming SAE J 514:


- P = 1 5/16-12 UN-2B
- S = Flange, suction port
- D = 1 1/16-12 UN-2B
- LS = G 1/4 (ISO 228/1 (BSPP)) with adaptor for 7/16-20 (SAE-4)

Ports (ISO 228/1 (BSPP)):


- P = Pressure outlet G1
- S = Flange, suction port
- D = Case drain G 3/4


Rotation direction, counter clockwise (L) (facing the input shaft)

Additional input shaft designs

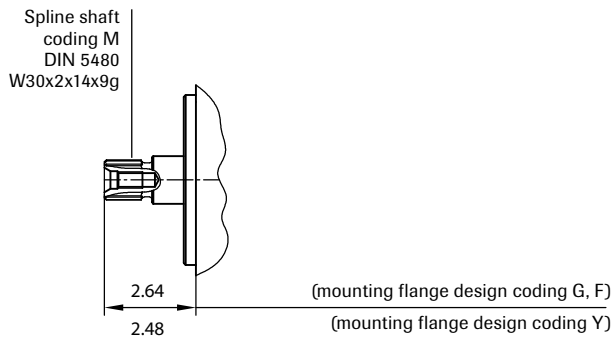


Additional mounting flange design

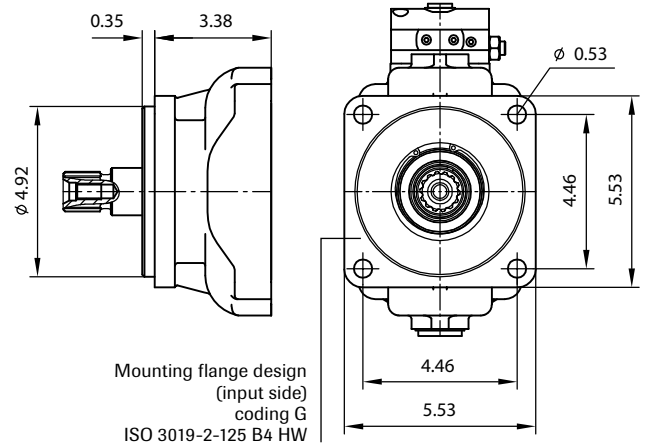

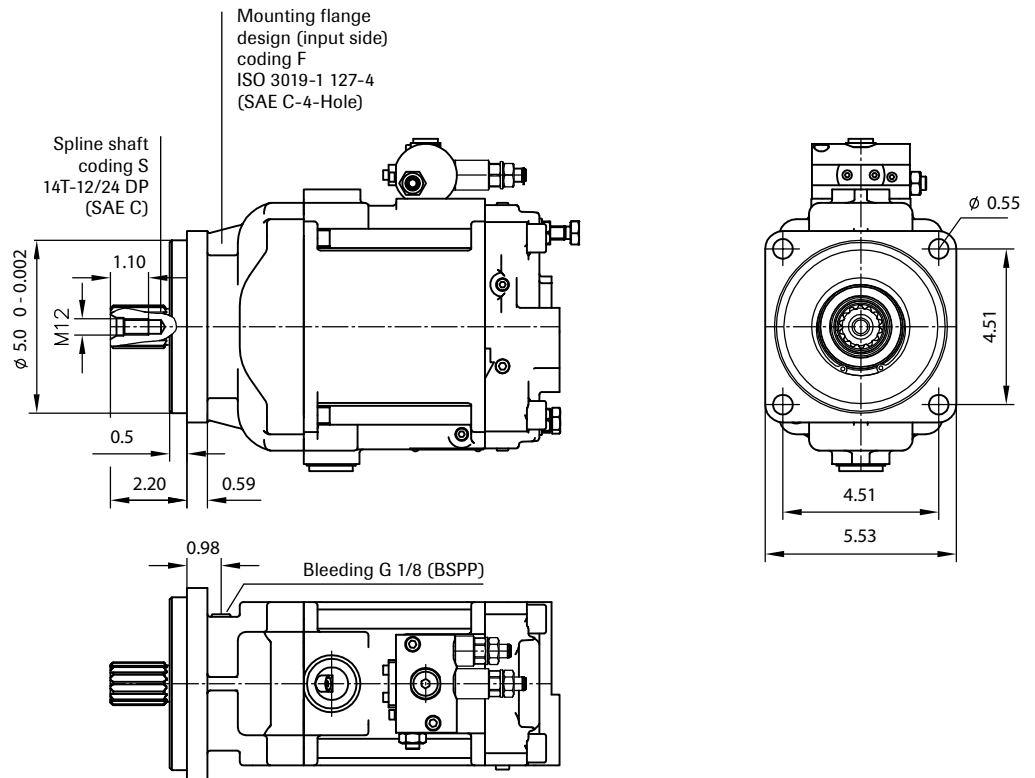


SVH 092 with thru-shaft











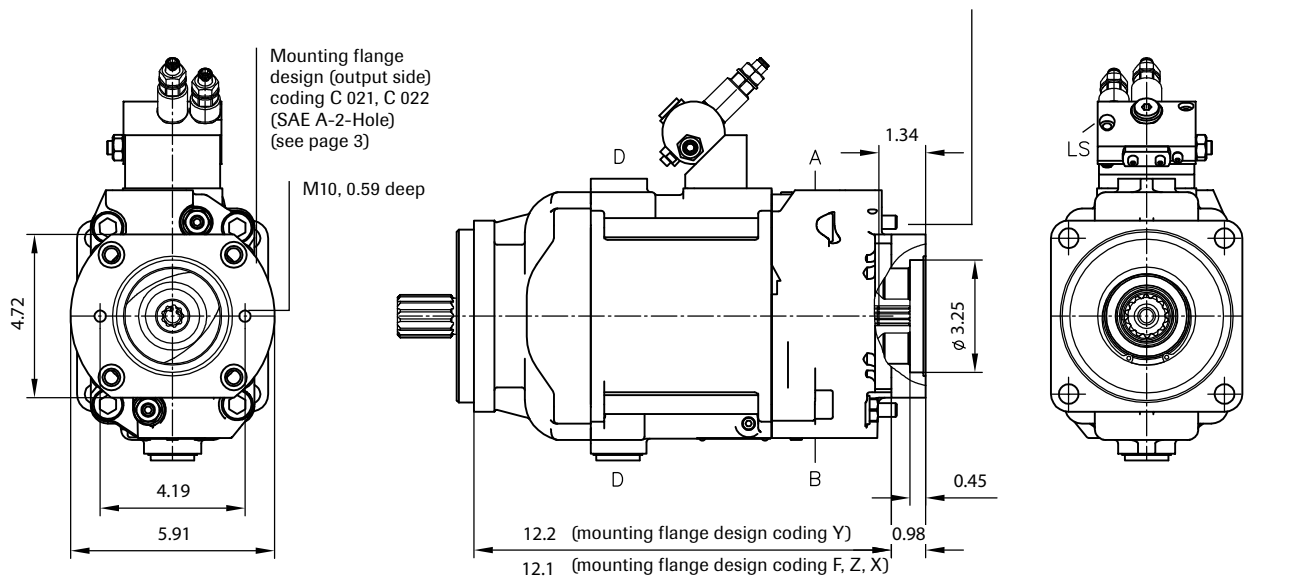


Right hand
 A Suction port
 B Pressure outlet

Left hand
 A Pressure outlet
 B Suction port

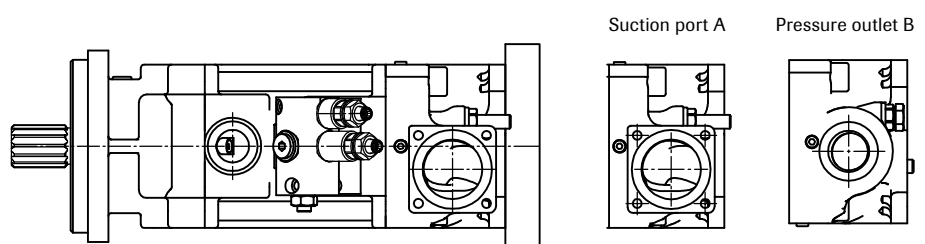

For port sizes, see page 11

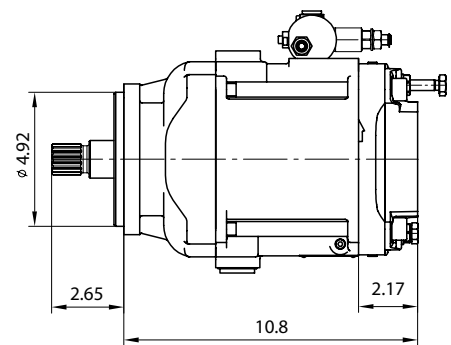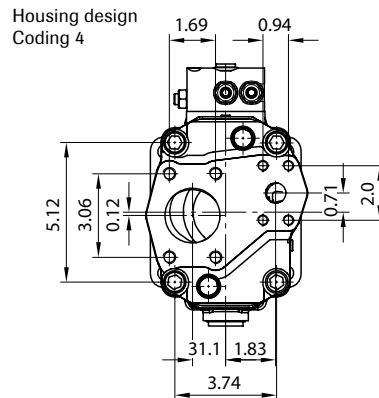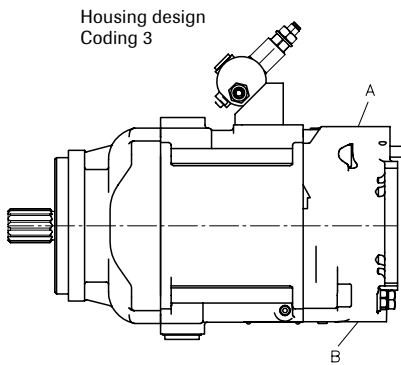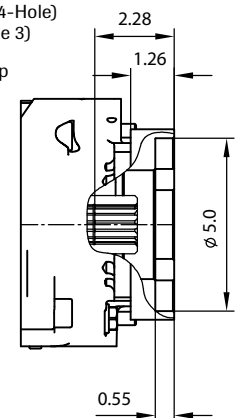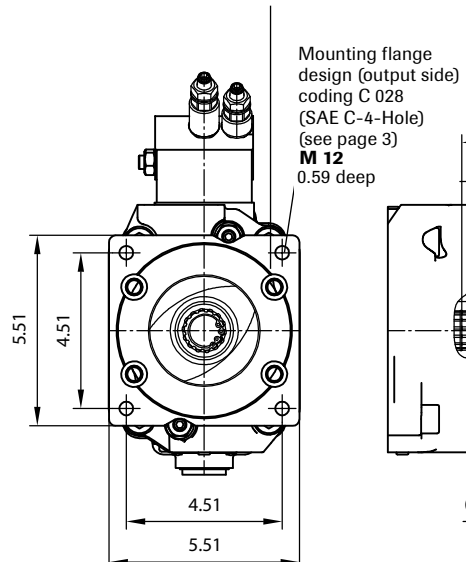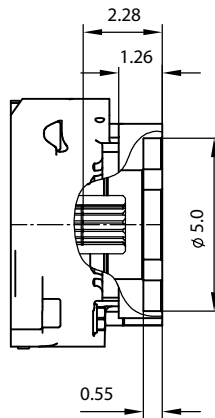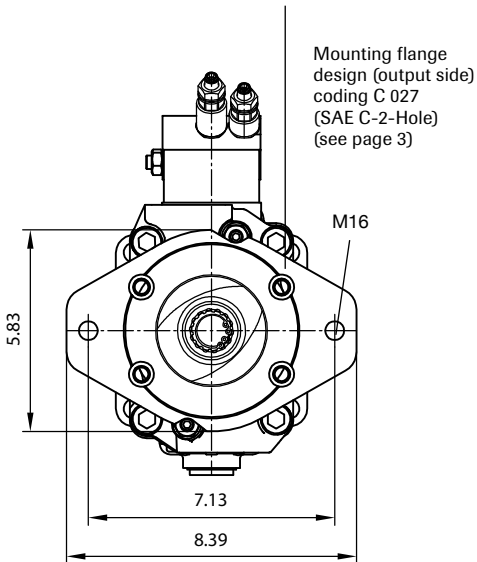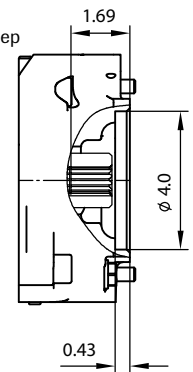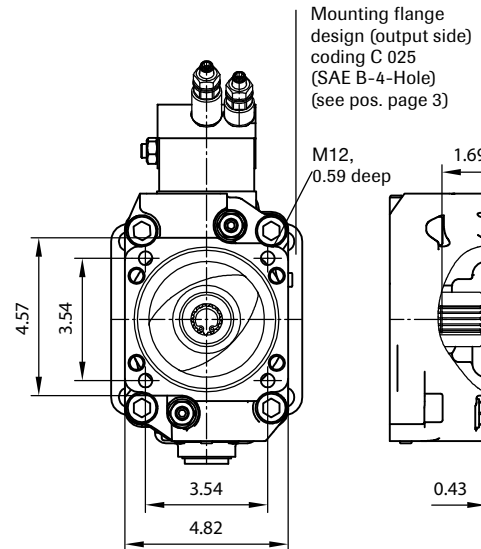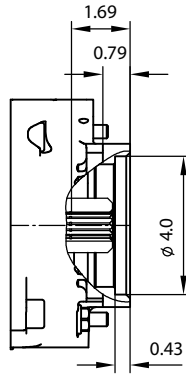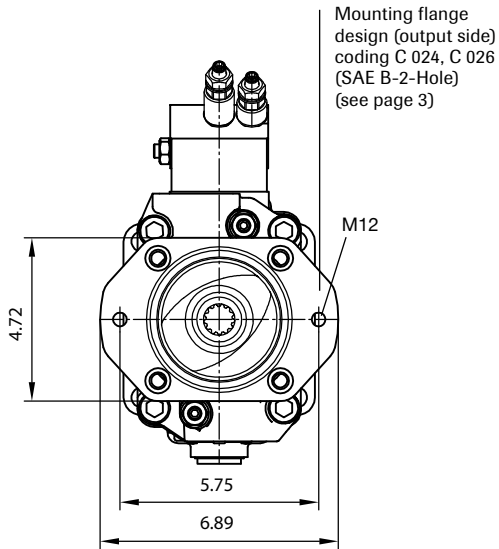


For available mounting flange designs (output side) and coupling sleeves, see page 3

Ports


P =	SAE 3/4"	(6000 psi)
S =	SAE 2"	(3000 psi)



SVH 112

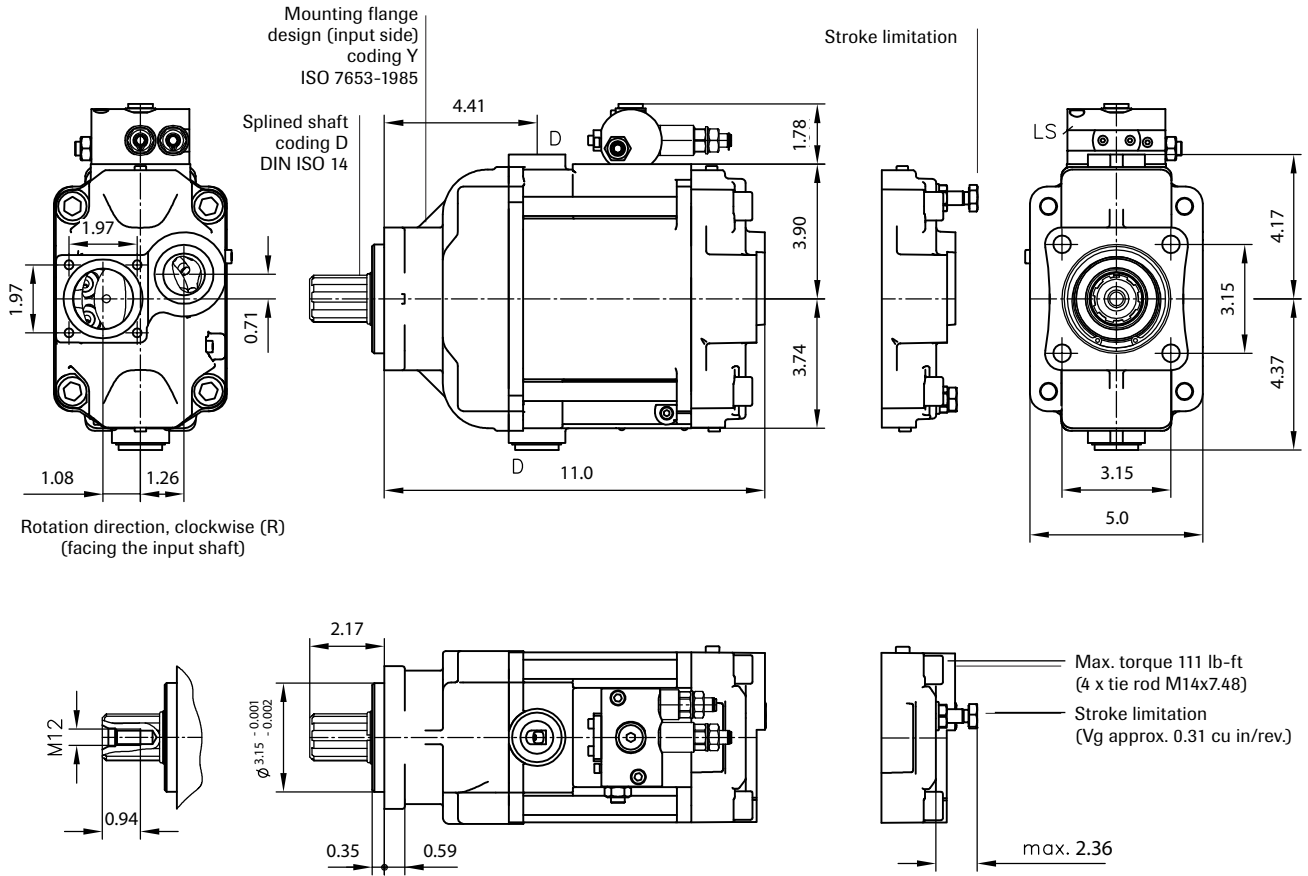


Additional input shaft designs and mounting flange design

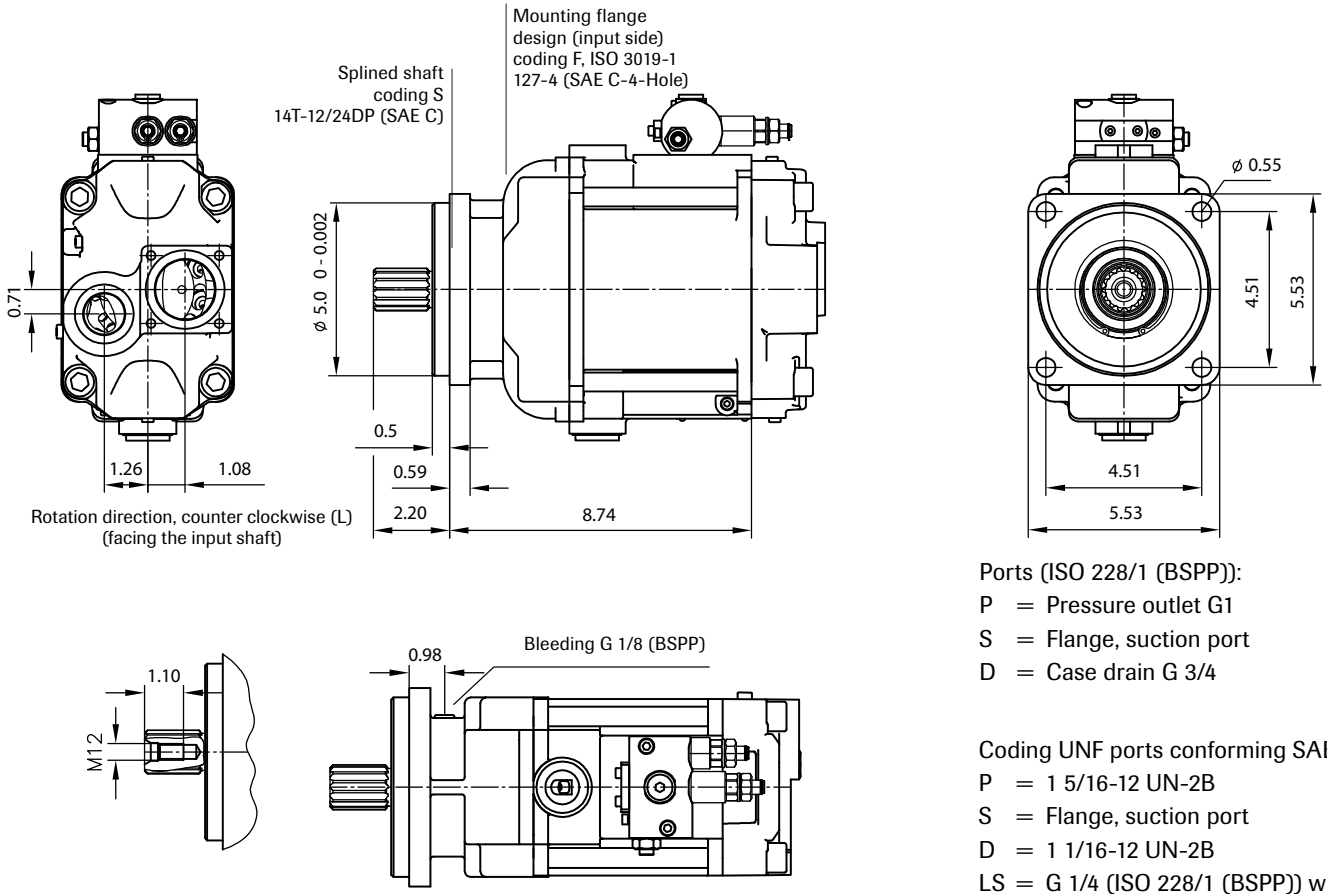






Additional input shaft designs

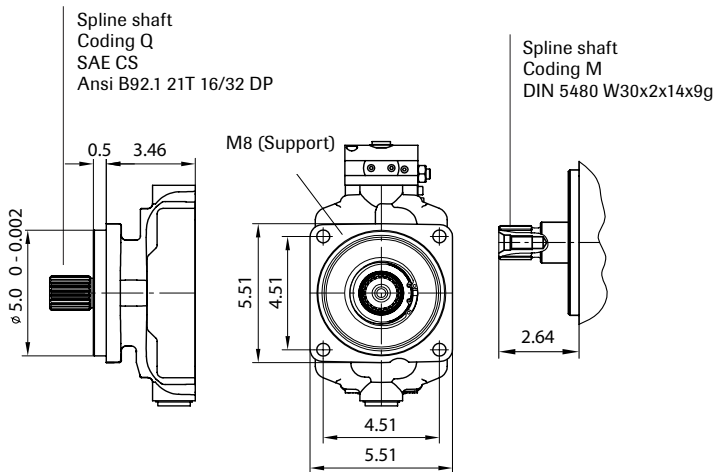


Additional mounting flange design

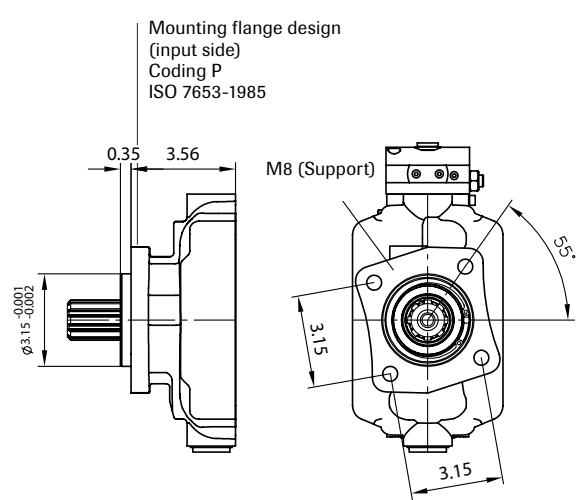

SVH 112 with thru-shaft

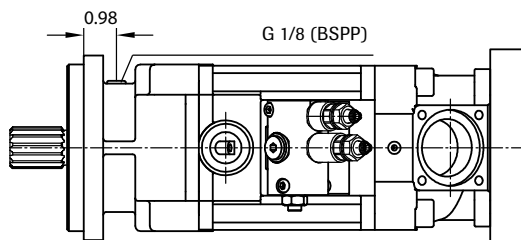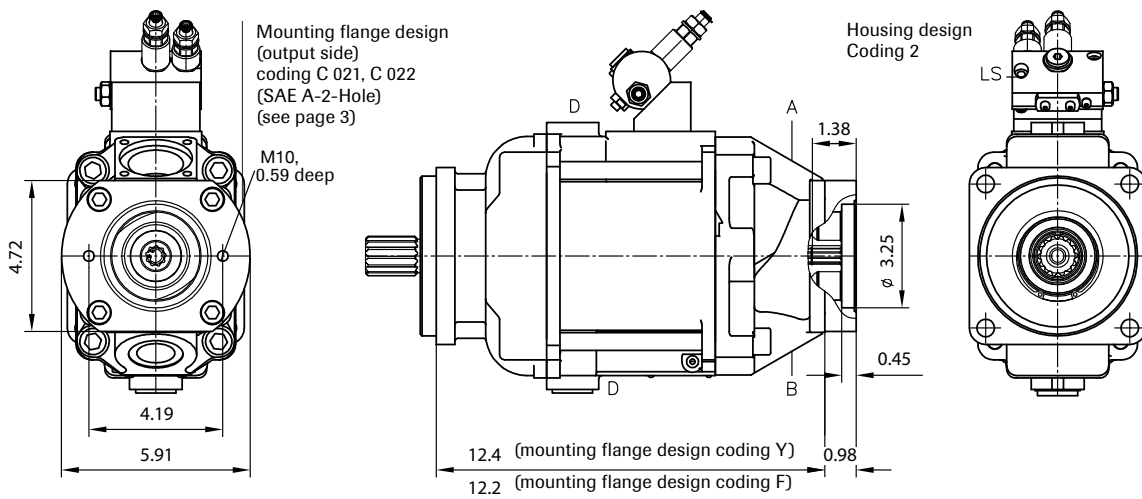


Suction port A








- Right hand
- A Suction port
- B Pressure outlet

Pressure outlet B




- Left hand
- A Pressure outlet
- B Suction port

For port sizes, see page 14

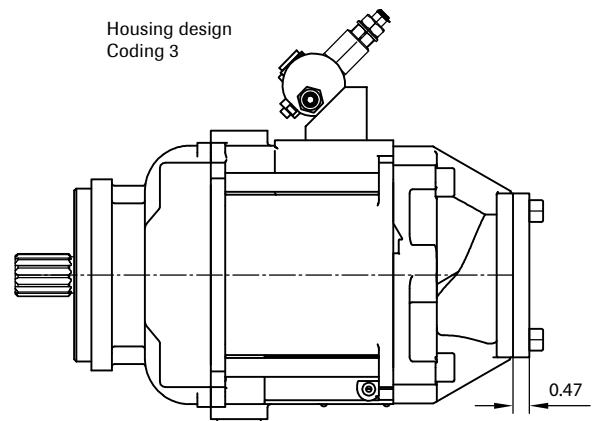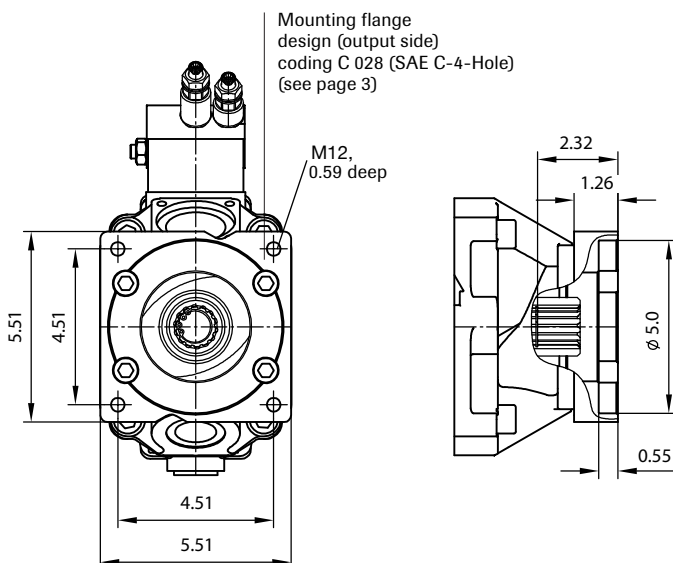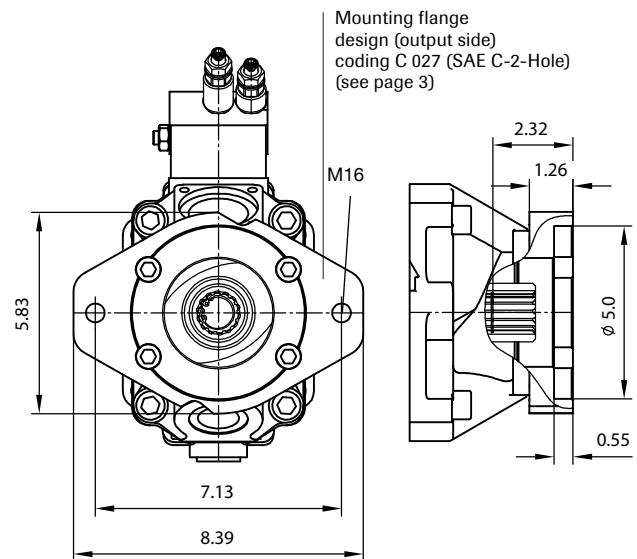
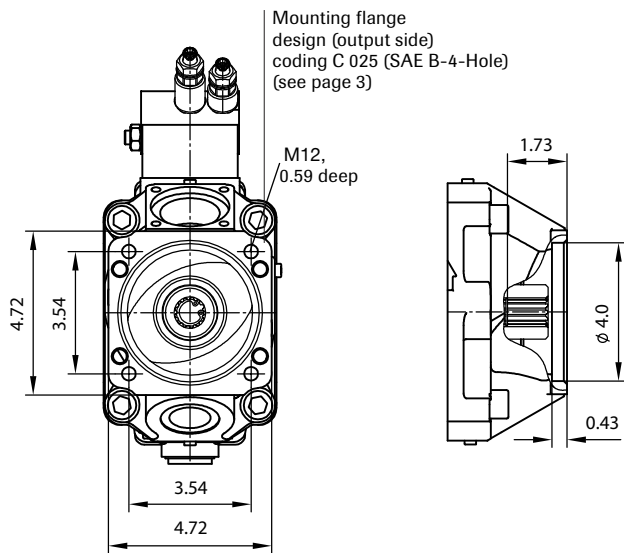
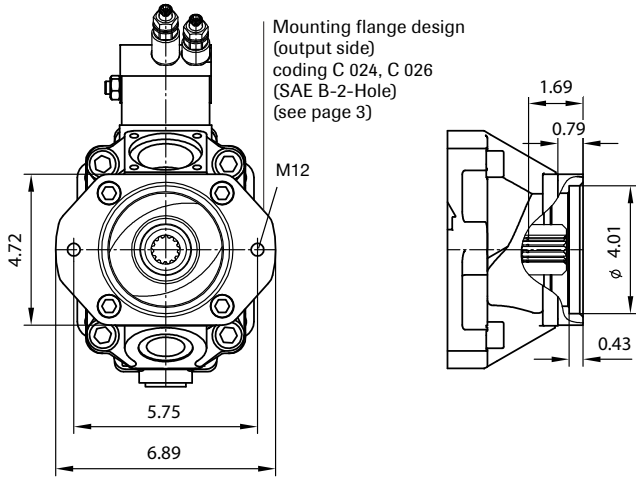




SVH 130

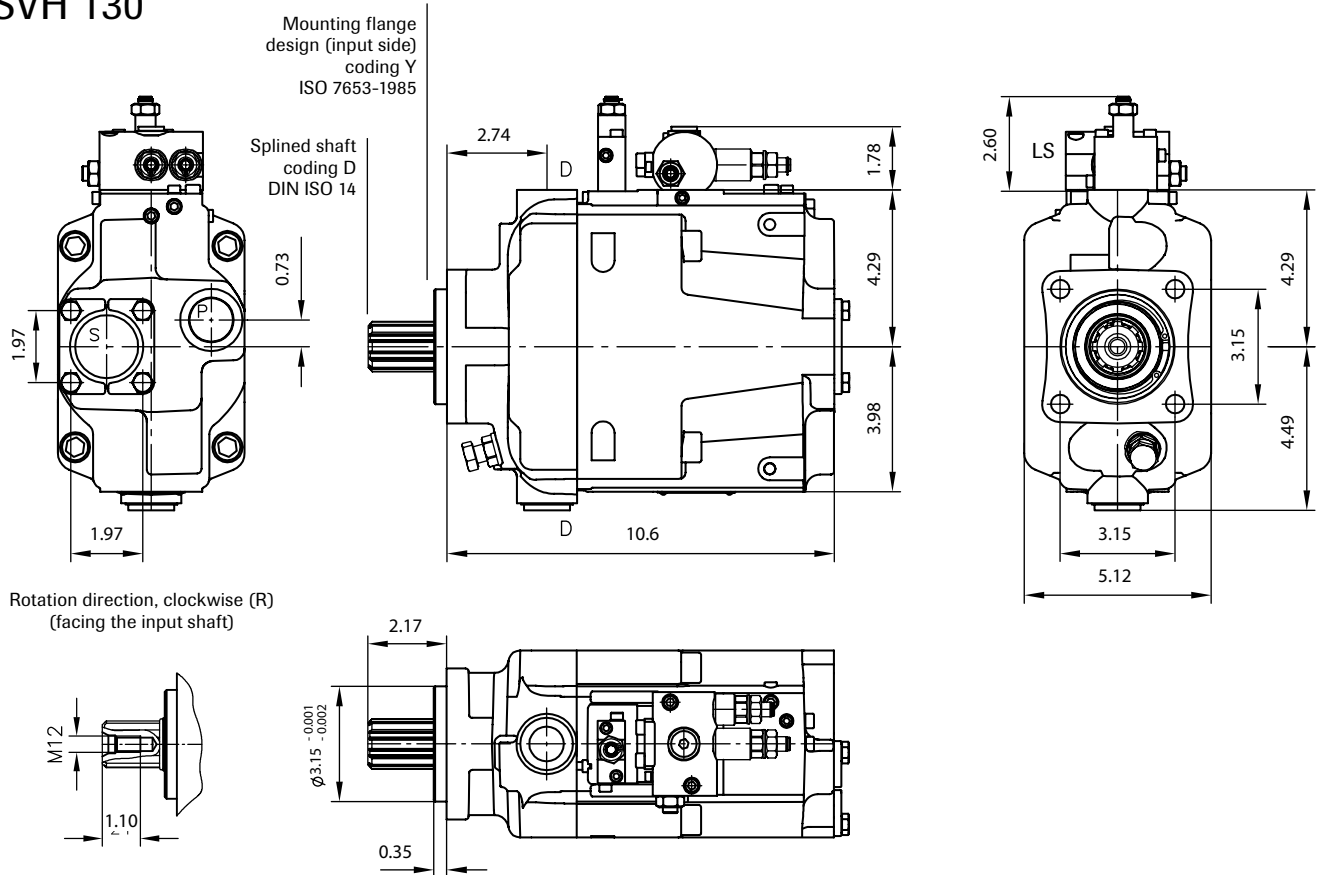

Additional input shaft designs and mounting flange design

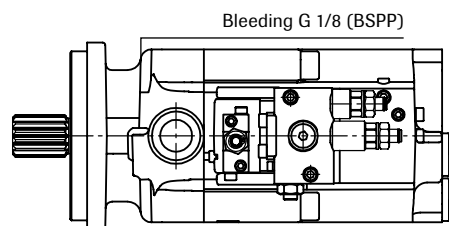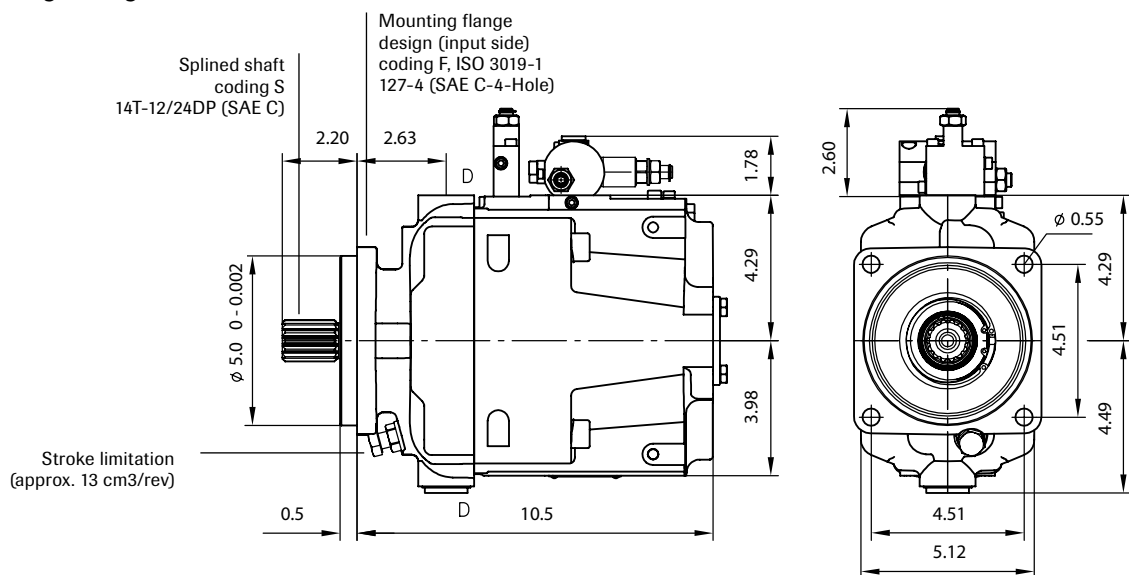

Ports (ISO 228/1 (BSPP)):


- P = Pressure outlet G 1
- S = Flange, suction port
- D = Case drain G 3/4

Coding UNF ports conforming SAE J 514:


- P = 1 5/16-12 UN-2B
- S = Flange, suction port
- D = 1 1/16-12 UN-2B
- LS = G 1/4 (ISO 228/1 (BSPP))
with adaptor for 7/16-20 (SAE-4)

SVH 130

Additional input shaft designs

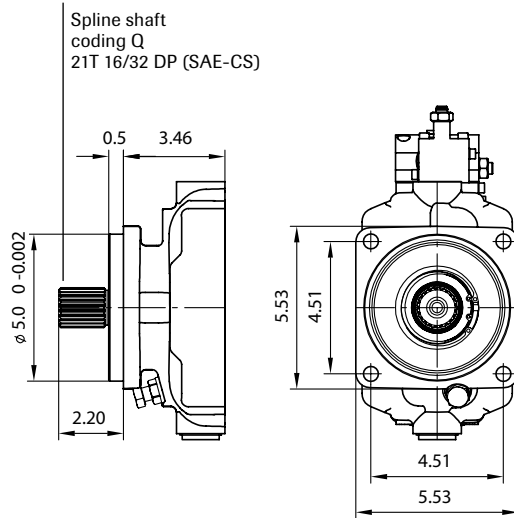







Additional mounting flange design

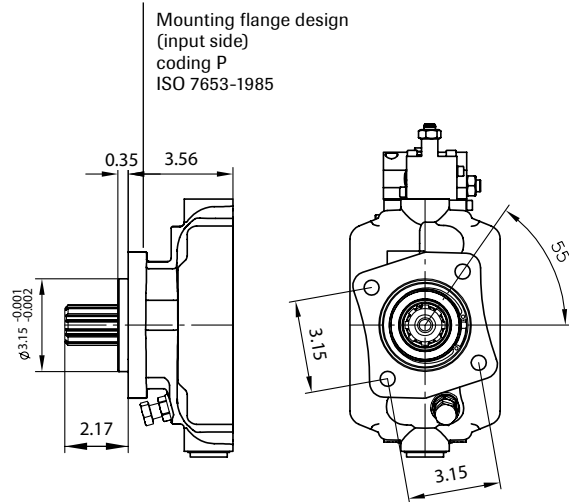



SVH 130 with thru-shaft

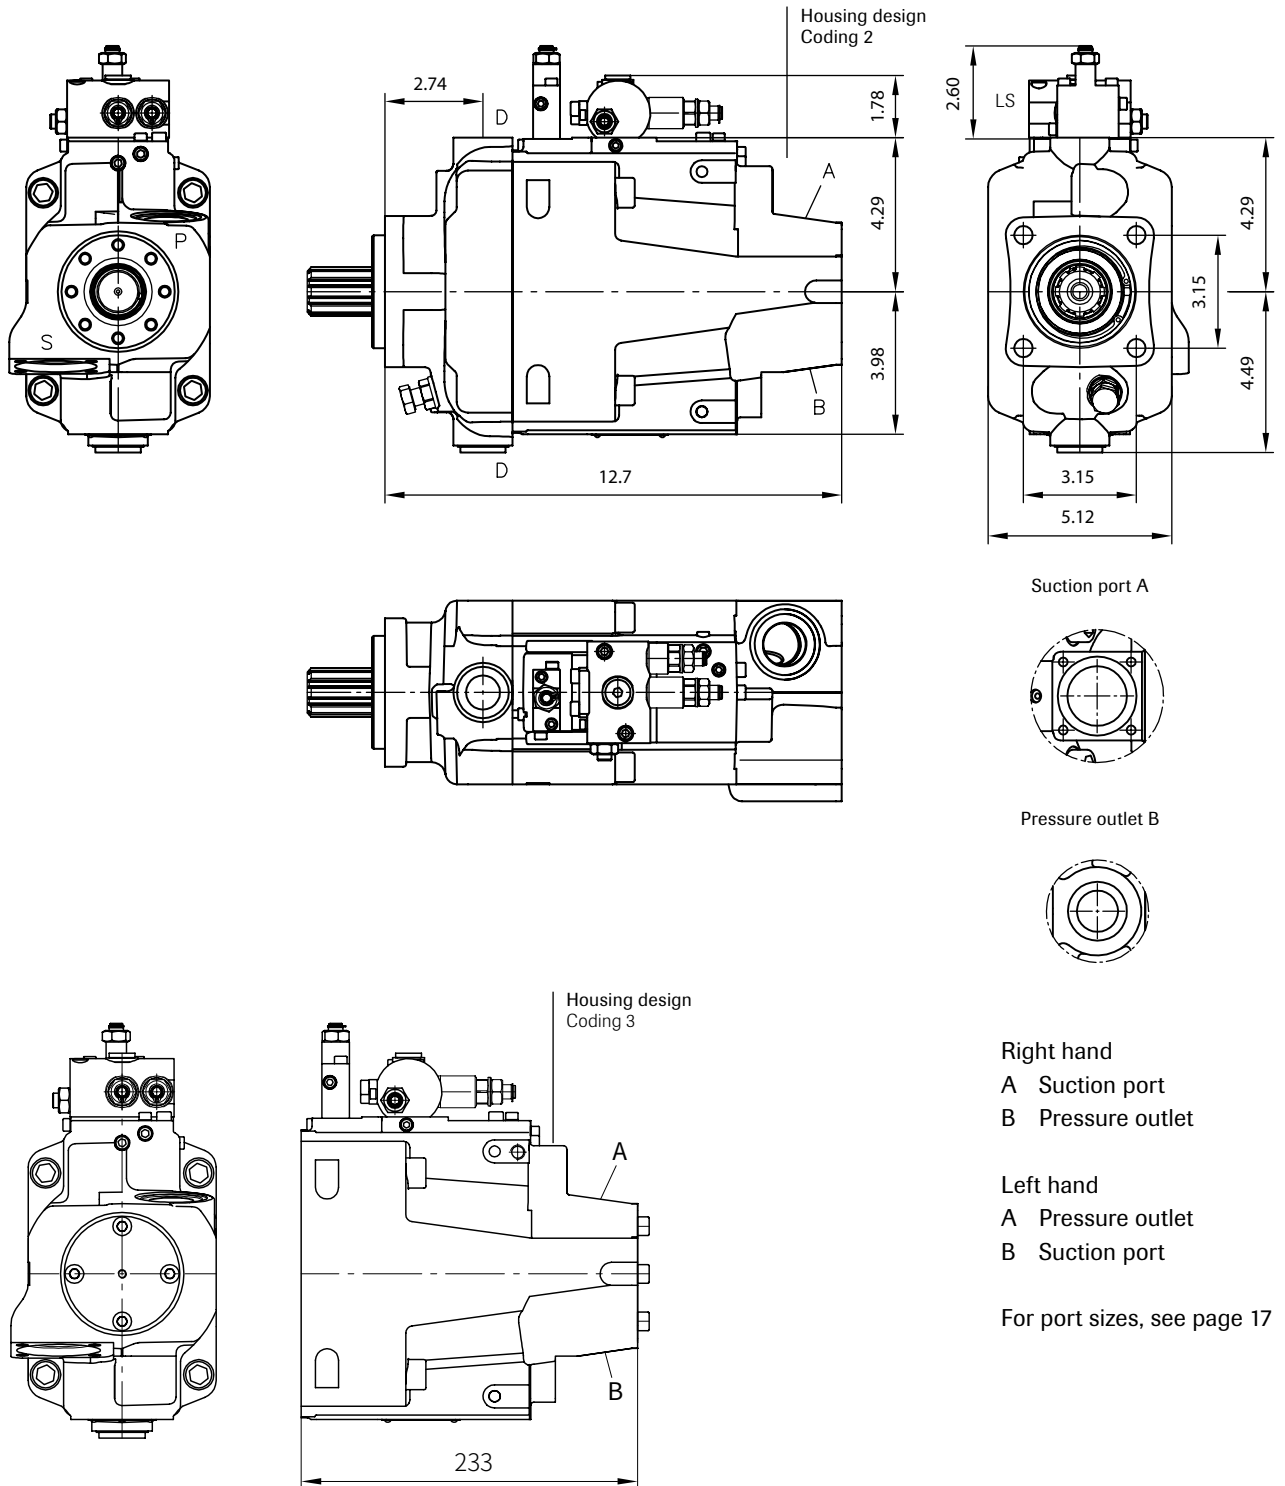

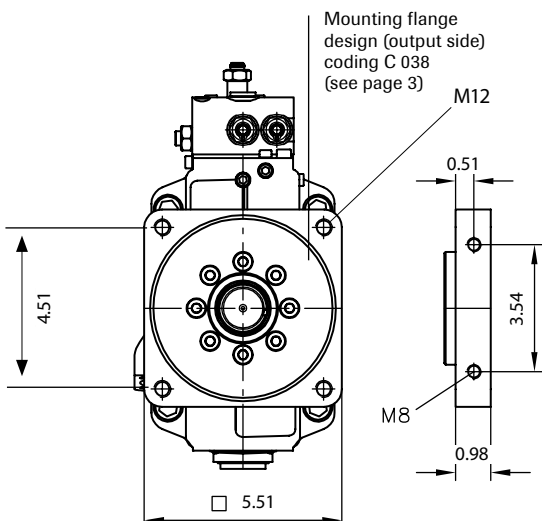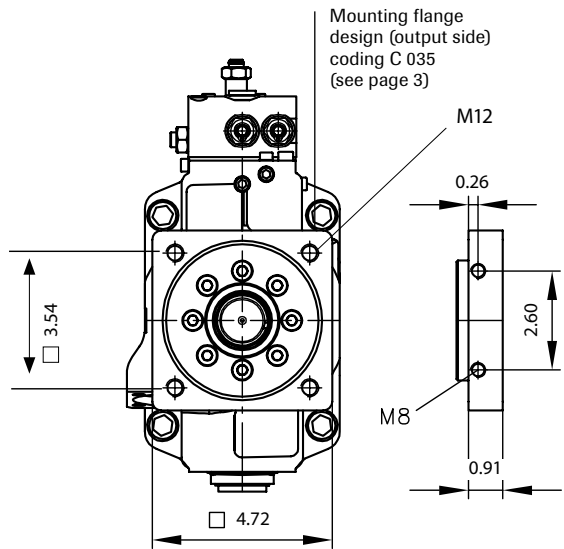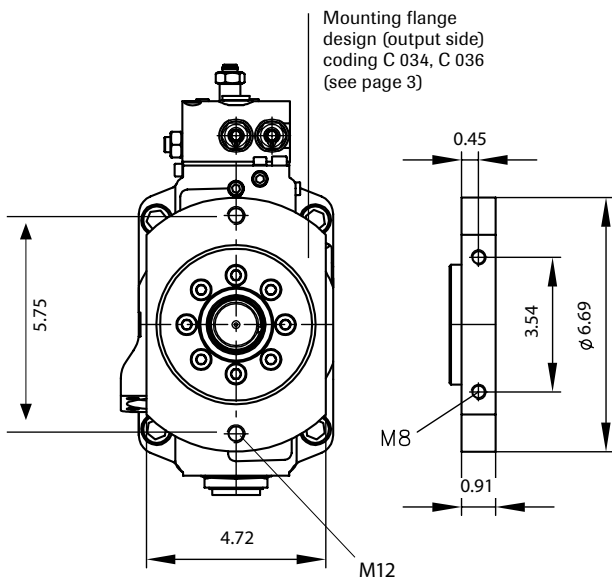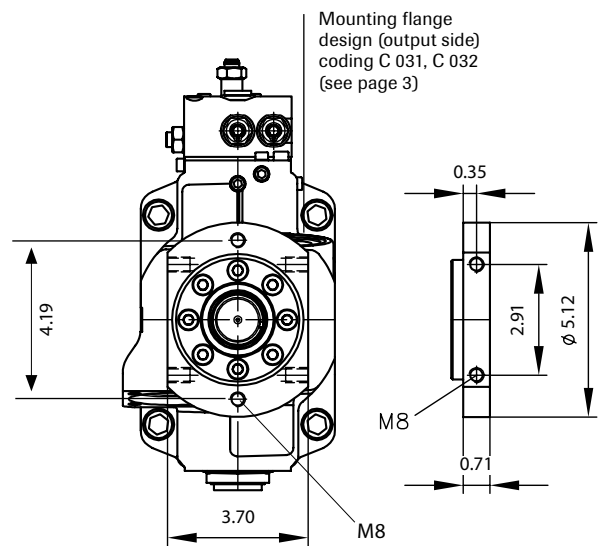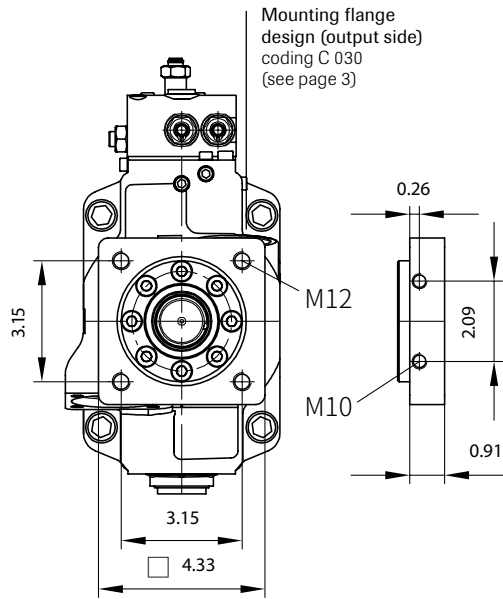

**WARNING**

When the pump is running:

1. Do not touch the pressure hose
2. Watch out for rotating parts
3. The pump and hoses may be hot

Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.
© Copyright 2022 Sunfab Hydraulics AB. All Rights Reserved.