

## SERIES 126.00

coupling, Article: NB270

Reference Number: 126.00.KVNS.IG014.MNP

Nominal width 7.8 mm, material: brass, surface: nickel plated, single shut off, connection type: female thread DIN228/1 (BSP), connection size: 1/4, seal: NBR (Perbunan)

**Technique:** One-hand coupling with automatic 5-point locking. Ball locking system with spring-loaded release sleeve. Disconnect by pushing the release sleeve back into the direction of the connection. The valve will return to its starting position and pushes the plug out of the coupling.

**Technical Characteristics:** Material coupling: back part and body are made of brass nickel plated. Valve brass. Sleeve steel hardend nickel plated. Seal NBR (Buna N). Spring and circlip stainless steel AISI 301. Balls stainless steel AISI 420. Material plug: steel hardend zink plated.

**Note:** Please refer to the relevant **product information** for our items.

You can find more information about our product at:

[www.steinconnector.com/shop/detail/413d619ddab445fea7b48c606a0db2cb](http://www.steinconnector.com/shop/detail/413d619ddab445fea7b48c606a0db2cb)

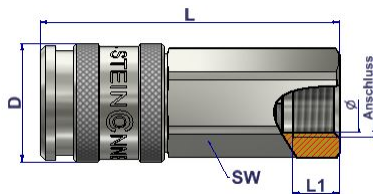


Image similar to the original

### Technical Characteristics

<b>Series</b>	126	<b>Connection Size</b>	female thread DIN228/1 (BSP)
<b>Nominal Width</b>	7.8 mm	<b>Connection Type</b>	1/4
<b>Type</b>	coupling	<b>Operating Temperature</b>	from -20 °C to 100 °C
<b>Valve</b>	single shut off	<b>Pressure Range max.</b>	35 bar
<b>Seal</b>	NBR (Perbunan)	<b>Flow Rate</b>	2,030 l/min
<b>Surface</b>	nickel plated	<b>Handling</b>	One-hand coupling
<b>Material</b>	brass	<b>Vacuum suitable 0.95 bar</b>	Yes
		<b>Options</b>	Coupling available with other seals on request.

### Dimensions / Details



<b>Connection</b>	1/4
<b>Ø</b> (Diameter inside)	11 mm
<b>D</b> (Diameter outside)	23 mm
<b>L</b> (length)	58 mm
<b>L1</b> (length)	9 mm
<b>SW</b> (key width)	19 mm