

SERIES 126.V0

coupling, Article: NB700

Reference Number: 126.V0.KVNS.AR014.MNP

Nominal width 7.8 mm, material: brass, surface: nickel plated, single shut off, connection type: male thread DIN2999 (BSPT), connection size: 1/4, seal: NBR (Perbunan)

Technique: One-hand coupling with automatic 5-point locking. Locking elements are balls which are locked by a spring-loaded unlocking sleeve. Disconnect by pushing the release sleeve back into the direction of the connection. The valve moves back to its original position and closes the coupling. All couplings in this series have an additional lock nut to secure the coupling against accidental uncoupling.

Technical Characteristics: Material coupling: back part and body are made of brass nickel plated. Valve brass. Sleeve steel hardend nickel plated. Seal NBR (Buna N). Spring and circlip stainless steel AISI 301. Balls stainless steel AISI 420. Material plug: steel hardend zink plated.

Note: Please refer to the relevant **product information** for our items.

You can find more information about our product at:

www.steinconnector.com/shop/detail/c8e8873f3ee848cbb5d66798bd1c9084

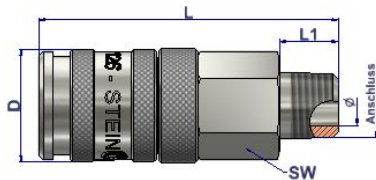


Image similar to the original

Technical Characteristics

Series	126	Connection Size	male thread DIN2999 (BSPT)
Nominal Width	7.8 mm	Connection Type	1/4
Type	coupling	Operating Temperature	from -20 °C to 100 °C
Valve	single shut off	Pressure Range max.	35 bar
Seal	NBR (Perbunan)	Flow Rate	2,030 l/min
Surface	nickel plated	Handling	One-hand coupling
Material	brass	Vacuum suitable 0.95 bar	Yes

Dimensions / Details



Connection	1/4
Ø (Diameter inside)	8 mm
D (Diameter outside)	23 mm
L (length)	61 mm
L1 (length)	12 mm
SW (key width)	19 mm