

SERIES 160.0S

plug, Article: OMAN0

Reference Number: 160.0S.S00S.IG014.SZ0

Nominal width 5.0 mm, material: steel, surface: zinc-plated, connection type: female thread DIN228/1 (BSP), connection size: 1/4

Technique: Two-hand coupling with 2-point bolt locking. Single piece coupling body with connection - ideal for absorbing significant bending and torsion forces. Positive connection between coupling and plug. Counter nut prevents the connection from being opened unintentionally.

Technical Characteristics: Coupling body, sleeve and locking nut are made from steel zinc plated. Valve brass. Spring and circlip stainless steel AISI 301. Bolts stainless steel AISI 316. Seals made from material FPM (Viton). Plug: steel zinc plated

Note: Please refer to the relevant **product information** for our items.

You can find more information about our product at:

www.steinconnector.com/shop/detail/ea51a12802364495b82b6b788022cb51

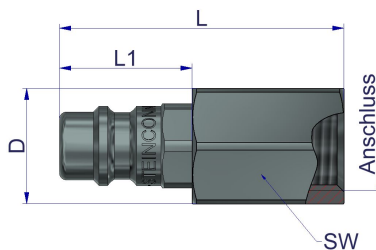


Image similar to the original

Technical Characteristics

Series	160	Connection Size	female thread DIN228/1 (BSP)
Nominal Width	5 mm	Connection Type	1/4
Key	hexagonal	Operating Temperature	from -20 °C to 200 °C
Type	plug	Pressure Range max.	35 bar
Surface	zinc-plated	Flow Rate	910 l/min
Material	steel	Handling	Two-hand coupling
		Vacuum suitable 0.95 bar	Yes

Dimensions / Details



Connection	1/4
Ø (Diameter inside)	5.5 mm
L (length)	42 mm
L1 (length)	20 mm
SW (key width)	17 mm