


# CONTROL HANDSET FOR SINGLE-ACTING UNITS FOR SMART START

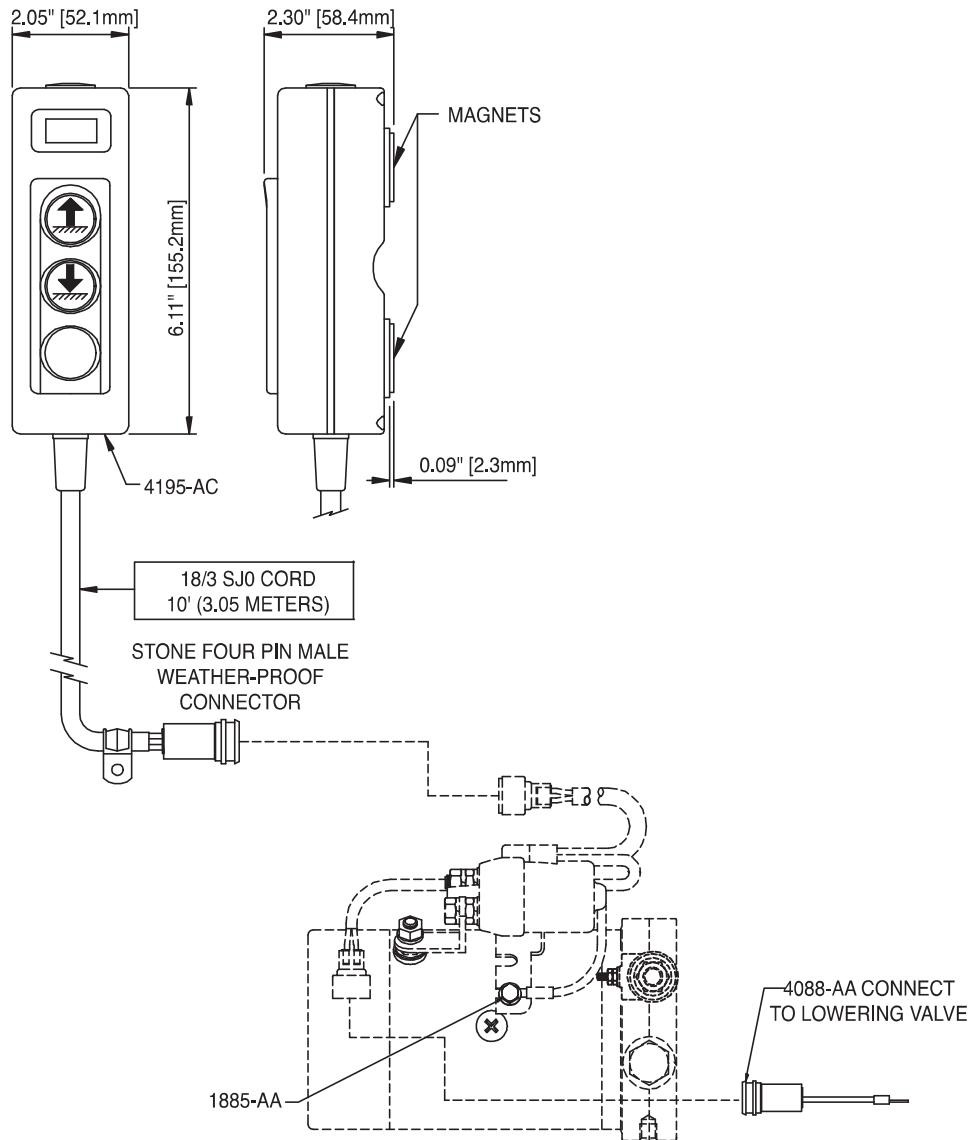

DC voltage only.

To be used with DC-20SF power units and KC01C or KC01F valve kit, using KS5 start solenoid.

For bulkhead mounting, order holster 2817-AA.

For wall mounting, order bracket hook 2686-AA.

Magnets are intended for convenience during use. They are not intended to support the handset during motion.

Use 3467-AA jumper when using 24 volts.

Order 3553-AA when wiring smart start to other than Stone supplied cordset.